

lightwolf® 
Ihr spezielles Licht



Coppistraße 91
D-04157 Leipzig
Germany
Tel.: +49 (0) 341-9105850
Fax: +49 (0) 341-91075030
E-mail: 01@lightwolf.de

Showroom
Döbichauer Straße 5-7
D- 04435 Schkeuditz / Dölzig
Germany




www.lightwolf.de

LED STRIP LIGHT

Part number identification

LW	2835	-W	N	120	-W	-12V	-8MM
Brand Name	LED Type	PCB color	Waterproof Type	LED Qty. per meter	LED Color	Voltage	PCB width

Waterproof Type

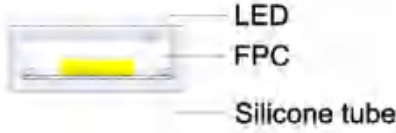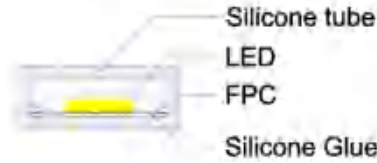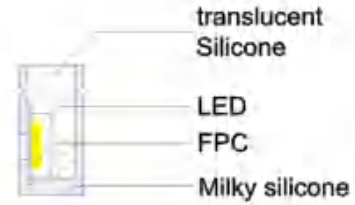Type	IP Process	Size	IP Rating	Waterproof Type Code
Non-waterproof	 LED FPC	for all strip	IP20	N
Dripping glue	 LED FPC Glue	The thickness of 3 mm same width as PCB	IP54	U
Silicone tube	 LED FPC Silicone tube	4.5X10mm 4.5x12mm 4.5X14mm	IP65	C
Potting glue	 Silicone tube LED FPC Silicone Glue	4.5X7mm 4.5X10mm 4.5x12mm 4.5X14mm	IP67	UC
Hollow extrusion	 LED FPC Silicone	4.5X7mm 4.5X10mm 4.5x12mm 4.5X14mm	IP65	K
Solid extrusion	 LED FPC Silicone	4.5X7mm 4.5X10mm 4.5x12mm 4.5X14mm	IP67	S
Neon extrusion	 translucent Silicone LED FPC Milky silicone	Please refer to "Silicone Neon Strip"	IP65	H

LED Chips

All of our LEDs are packaging with double high thick 99.99% Gold Wire, Lifespan>50000 hours, SANAN/EPISTAR/SAMSUNG/LUMILEDS..., Color temperture consistency,High Lumen output. High transmittance,No leakage
Our Main LEDs Supplier: **Honglitrronic**



Pure copper -Double circuit board

Using high quality double-sided(double lines) pure copper circuit board ,2Oz, 3Oz, 4Oz PCB thickness that make sure lower voltage drop and execcellent heat dissipation, with good electrical and thermal conductivity,long lifespan,high flexibility, not easy to break.,customizde service(Print logo/company name etc) is acceptable

Free to cut the length you want

DIY Cutting, 12V 3LEDs/cut, 24V 6LEDs/cut,to avoid wasting.



Welding PCB

Rich skilled workers are selected to solder the led strip light that can enhance to robustness of PFC board and its electric conductivity. also can decrease the possibility of tact weld,missing soldering.Quality can be more guaranteed.



3M Adhensive Tape

3M 300LSE(Standard), 3M VHB, Original 3M double-sided adhsvie tape strong stickness,not easy to fall off excellent heat conductivity no peculiar smell



CONTENTS

Lens LED Strip

Lens LED Strip 01

Single Color LED Strip

COB Series 07
2835 Series 19
2216 Series 29
5050 Series 32
3014 Series 35
5730 Series 38
5V Series 40
S Shape Serie 42
3014 Side View Series 46
IR/UV/Plant Grow Series 48

CCT Adjustable LED Strip

5050 CCT Series 51
3014 CCT Series 51
2835 CCT Series 52
3527 CCT Series 60
2216 CCT Series 61

Constant Current LED Strip

2835 HL Series 65
3014 HL Series 69
5050 HL Series 71

PCB width 3-5mm LED Strip

2835 5MM Series 77
3014 5MM Series 78
2216 5MM Series 79
PCB width 4mmLED Strip 81
PCB width 3mmLED Strip 82

RGB/RGBW/RGBCCT LED Strip

5050 RGB Series 85
4040 RGB Series 87
3838 RGB Series 88
3535 RGB Series 89
5050 RGBW Series 90
5050 RGBCCT Series 94

Magic(Digital) LED Strip

RGB Magic Series 99
5V Magic Series 101
RGBW Magic Series 102
RGBCCT Magic Series 103
2835 Single Color Chasing and Running Strip 106
High Lumen Efficiency LED Strip 109

Silicone Neon Strip

Silicone Neon Strip 117

Power supply and Accessories

LED Driver Adaptor 129
LED Power Supply 131
Cabinet light accessories 132
LED Controller 133
Strip Connector 134

Lens LED Strip



LW2835-WUC42-HL-24V-22MM*11MM-Lens

- Lens LED strip, Lens angle options:30°, 45°
- 42LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



LW2835-WUC42-HL-CCT-24V-22MM*11MM-Lens

- Dual color lens LED strip, Lens angle options: 30°, 45°
- 42LEDs/m with slim thickness of 1.2mm
- 2in1 LED,can match any two kinds of color temperature
- CRI 90+ are available CRI90+
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	42LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	166.7MM
Cutting Unit	7 LEDS
Luminous flux	14.4W/m
2700K (RA80)	
3000K (RA80)	1510 Lm/m
4000K (RA80)	1530Lm/m
6000K (RA80)	1580Lm/m
	1630Lm/m



Product features:	
LED Type	SMD2835
LEDs/Meter	42LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	166.7MM
Cutting Unit	7 LEDS
Power/M	16.8W/m
Luminous flux	1800Lm/m
(RA90)	

LW5050-WUC42-RGB-HL-24V-22*11MM-Lens

- RGB lens LED strip, Lens angle options:35°
- 42LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 RGB LED
- Customized power available



LW5050-4WUC42-RGBW-HL-24V-22*11MM-Lens

- RGBW lens LED strip, Lens angle options: 35°
- 42LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



Product features:	
LED Type	SMD5050
LEDs/Meter	42LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	166.7MM
Cutting Unit	7LEDs
Power/M	18W/m
Wavelength	Red(620-625nm)
	Green(520-525nm)
	Blue(465-470nm)



Product features:	
LED Type	SMD5050
LEDs/Meter	42LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	166.7MM
Cutting Unit	7LEDs
Power/M	20W/m
Wavelength/CCT	Red(620-625nm)
	Green(520-525nm)
	Blue(465-470nm)
	White(2700K/3000K/4000K/6000K)

LW5050-WUC42-RGB-2811/1903-24V-22*11MM-Lens

- Lens LED strip, Lens angle options:35°
- Safety voltage, 2811/1903 constant current drive IC
- 42LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



24V
DC

RGB

Product features:

LED Type	SMD5050
LEDs/Meter	42LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	166.7MM
Cutting Unit	7LEDS
Power/M	8W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW2835-WN120-24V-8MM/10MM-Lens

- Lens LED strip, Lens angle options: 20° , 30° , 45° , 60°
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2700K, 3000K,4000K,6500K
- CRI 90+ are available
- Customized power available



24V
DC

white

Product features:

LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC24V	DC24V
PCB width	8MM	10MM
Cutting length	50MM	50MM
Cutting Unit	6LEDS	6 LEDS
Power/M	12W/m	14.4W/m
Luminous flux		
	2700K (RA90)	1130 Lm/m 1370 Lm/m
	3000K (RA90)	1150Lm/m 1390Lm/m
	4000K (RA90)	1200Lm/m 1440Lm/m
	6000K (RA90)	1250Lm/m 1490Lm/m



LW2835-WUC48-24V-13MM-1led cutting-Lens

- Lens LED strip, Lens angle options: 15° , 25° , 30° , 45°
- 48LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ and CRI 90+ are available



24V
DC

white

Product features:

LED Type	SMD2835
LEDs/Meter	48LEDs/m
Input Voltage	DC24V
PCB width	13MM
Cutting length	20.833MM
Cutting Unit	1 LEDS
Power/M	14W/m
Luminous flux	
	2700K (RA90) 1400 Lm/m
	3000K (RA90) 1470Lm/m
	4000K (RA90) 1540Lm/m
	6000K (RA90) 1610Lm/m

LW2835-WUC48-24V-13MM-1led cutting-Lens

- Lens LED strip, Lens angle options: 170°
- 48LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

Product features:

LED Type	SMD2835
LEDs/Meter	48LEDs/m
Input Voltage	DC24V
PCB width	13MM
Cutting length	20.833MM
Cutting Unit	1 LEDS
Power/M	14W/m
Luminous flux	
	2700K (RA90) 1400 Lm/m
	3000K (RA90) 1470Lm/m
	4000K (RA90) 1540Lm/m
	6000K (RA90) 1610Lm/m



COB Strip Light



LWCOB-WN320-12V/24V-8MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 320 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	320LEDs/m	320LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	25MM	50MM
Cutting Unit	8LEDS	16LEDS
Power/M	8W/m	8W/m
Luminous flux		
2700K (RA90)	640 Lm/m	640 Lm/m
3000K (RA90)	656Lm/m	656Lm/m
4000K (RA90)	680Lm/m	680Lm/m
6000K (RA90)	720Lm/m	720Lm/m

LWCOB-WN378-12V/24V-8MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 378 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	378LEDs/m	378LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	23.8MM	55.56MM
Cutting Unit	9LEDS	21LEDS
Power/M	8W/m	8W/m
Luminous flux		
2700K (RA90)	640 Lm/m	640 Lm/m
3000K (RA90)	656Lm/m	656Lm/m
4000K (RA90)	680Lm/m	680Lm/m
6000K (RA90)	720Lm/m	720Lm/m



LWCOB-WN462/468-24V/12V-8MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 462 /468pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	462LEDs/m	468LEDs/m
Input Voltage	DC24V	DC12V
PCB width	8MM	8MM
Cutting length	45.4MM	19.2MM
Cutting Unit	21LEDS	9LEDS
Power/M	10W/m	10W/m
Luminous flux		
2700K (RA90)	800 Lm/m	800 Lm/m
3000K (RA90)	820Lm/m	820Lm/m
4000K (RA90)	850Lm/m	850Lm/m
6000K (RA90)	900Lm/m	900Lm/m

LWCOB-WN480-12V/24V-8MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 480 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	480LEDs/m	480LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	16.66MM	33.33MM
Cutting Unit	8LEDS	16LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA90)	960 Lm/m	960 Lm/m
3000K (RA90)	1020Lm/m	1020Lm/m
4000K (RA90)	1140Lm/m	1140Lm/m
6000K (RA90)	1200Lm/m	1200Lm/m



LWCOB-WN324-12V-8MM-free cut

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 324 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB
LEDs/Meter	324LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	9.25MM
Cutting Unit	3LEDS
Power/M	8W/m
Luminous flux	
2700K (RA90)	600 Lm/m
3000K (RA90)	640Lm/m
4000K (RA90)	680Lm/m
6000K (RA90)	720Lm/m

LWCOB-WN320-5V-5MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 320 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB
LEDs/Meter	320LEDs/m
Input Voltage	DC5V
PCB width	5MM
Cutting length	6.25MM
Cutting Unit	2LEDS
Power/M	5W/m
Luminous flux	
2700K (RA90)	375Lm/m
3000K (RA90)	400Lm/m
4000K (RA90)	430Lm/m
6000K (RA90)	450Lm/m



LWCOB-WN320-12V/24V-5MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 320 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	320LEDs/m	320LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	25MM	50MM
Cutting Unit	8LEDS	16LEDS
Power/M	6W/m	6W/m
Luminous flux		
2700K (RA90)	480 Lm/m	480 Lm/m
3000K (RA90)	492Lm/m	492Lm/m
4000K (RA90)	510Lm/m	510Lm/m
6000K (RA90)	540Lm/m	540Lm/m

LWCOB-WN486-12V-5MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 486 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:

LED Type	COB
LEDs/Meter	486LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	18.5MM
Cutting Unit	9LEDS
Power/M	6W/m
Luminous flux	
2700K (RA90)	480 Lm/m
3000K (RA90)	492Lm/m
4000K (RA90)	510Lm/m
6000K (RA90)	540Lm/m



LWCOB-WN480-24V-5MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 480 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:		
LED Type	COB	
LEDs/Meter	480LEDs/m	
Input Voltage	DC24V	
PCB width	5MM	
Cutting length	50MM	
Cutting Unit	24LEDS	
Power/M	6W/m	
Luminous flux		
2700K (RA90)	480 Lm/m	
3000K (RA90)	492Lm/m	
4000K (RA90)	510Lm/m	
6000K (RA90)	540Lm/m	

LWCOB-WN480-12V/24V-10MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 480 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:		
LED Type	COB	COB
LEDs/Meter	480LEDs/m	480LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	16.66MM	33.33MM
Cutting Unit	8LEDS	16LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA90)	960 Lm/m	960 Lm/m
3000K (RA90)	1020Lm/m	1020Lm/m
4000K (RA90)	1140Lm/m	1140Lm/m
6000K (RA90)	1200Lm/m	1200Lm/m



LWCOB-WN504-12V/24V-10MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 504 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:		
LED Type	COB	COB
LEDs/Meter	504LEDs/m	504LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	17.9MM	41.67MM
Cutting Unit	9LEDS	21LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA90)	960 Lm/m	960 Lm/m
3000K (RA90)	984Lm/m	984Lm/m
4000K (RA90)	1020Lm/m	1020Lm/m
6000K (RA90)	1080Lm/m	1080Lm/m

LWCOB-WN480-24V-12MM-HL

- Safety voltage,IC control current
- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 480 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



Product features:	
LED Type	COB
LEDs/Meter	480LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	50MM
Cutting Unit	24 LEDS
Power/M	8W/m
Luminous flux	
2700K (RA90)	540 Lm/m
3000K (RA90)	560Lm/m
4000K (RA90)	600Lm/m
6000K (RA90)	640Lm/m



LWCOB-WN576-CCT-12V/24V-10MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 576 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- Two kinds of LED,2700K+6500K
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	576LEDs/m	576LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	27.78MM	55.57MM
Cutting Unit	16LEDS	32LEDS
Power/M	14W/m	14W/m
Luminous flux	1020Lm/m	1020Lm/m
(RA90)		

LWCOB-WN640-CCT-24V-10MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 640 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- Two kinds of LED,2700K+6500K
- Customized power available



Product features:

LED Type	COB
LEDs/Meter	640LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	32LEDS
Power/M	16W/m
Luminous flux	1280 Lm/m
(RA90)	

LWCOB-WN576-CCT-12V/24V-8MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 576 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- Two kinds of LED,2700K+6500K
- Customized power available



Product features:

LED Type	COB	COB
LEDs/Meter	576LEDs/m	576LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	27.78MM	55.57MM
Cutting Unit	16LEDS	32LEDS
Power/M	12W/m	12W/m
Luminous flux	1020Lm/m	1020Lm/m
(RA90)		

LWCOB-WN320-1934-24V-10MM Single color

- Safety voltage, 1934 constant current drive IC
- 320LEDs/m ,no dark dots
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



Product features:

LED Type	COB
LEDs/Meter	320LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	16LEDS
Power/M	10W/m
Luminous flux	
2700K (RA90)	800 Lm/m
3000K (RA90)	820Lm/m
4000K (RA90)	850Lm/m
6000K (RA90)	900Lm/m



LWCOB-WN840-RGB-24V-10MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 840 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



24V
DC

RGB

Product features:	
LED Type	COB
LEDs/Meter	840LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	42LEDS
Power/M	13W/m
Wavelength	Red(620-625nm)

Green(520-525nm)
Blue(465-470nm)

LWCOB-WN840-RGBCCT-24V-12MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
芯片固定在PCB上，用COB倒装技术，散热效果好，工作稳定并且更加灵活。
- 840 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
每米840颗灯，无光斑，搭配铝槽使用发光效果堪称完美
- 180° beam angle, 50% wider lighting than normal SMD design.
180度发光角度，比普通SMD贴片灯带发光角度高出50%
- Customized power available
可以按需求定制功率瓦数



24V
DC

RGBCCT

产品特点 Product features:	
灯珠型号LED Type	COB
灯珠数LEDs/Meter	840LEDs/m
电压Input Voltage	DC24V
板宽PCB width	12MM
裁切长度Cutting length	83.33MM
裁切单元Cutting Unit	70LEDS
功率Power/M	15W/m
波长/色温Wavelength/CCT	Red(620-625nm)

Green(520-525nm)
Blue(465-470nm)
Warm White(2700K)
White(6000K)

LWCOB-WN560-RGBW-24V-12MM

- Chips are fixed on PCB,Inverted COB gold-free technology,great heat-dissipation,work stably and more flexible.
- 560 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- 180° beam angle, 50% wider lighting than normal SMD design.
- Customized power available



24V
DC

RGB

Product features:	
LED Type	COB
LEDs/Meter	560LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	100MM
Cutting Unit	56LEDS
Power/M	14W/m
Wavelength/CCT	Red(620-625nm)

Green(520-525nm)
Blue(465-470nm)
White(2700K/3000K/4000K/6000K)

LWCOB-WN840-RGB-1934-24V-10MM

- Safety voltage, 1934 constant current drive IC
- 840 pcs per meter,no dark dots,perfect performance use together with aluminum profile.
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



24V
DC

RGB

Product features:	
LED Type	COB
LEDs/Meter	840LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	42LEDS
Power/M	10W/m
Wavelength	Red(620-625nm)

Green(520-525nm)
Blue(465-470nm)



LW2835-WN60-12V/24V-8MM

- Safety voltage,resistance control current
- 60LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	8W/m	8W/m
Luminous flux		
2700K (RA80)	784 Lm/m	784 Lm/m
3000K (RA80)	800Lm/m	800Lm/m
4000K (RA80)	840Lm/m	840Lm/m
6000K (RA80)	864Lm/m	864Lm/m

LW2835-WN120 -12V/24V-8MM

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	25MM	50MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	9.6W/m	9.6W/m
Luminous flux		
2700K (RA80)	940 Lm/m	940 Lm/m
3000K (RA80)	950Lm/m	950Lm/m
4000K (RA80)	1008Lm/m	1008Lm/m
6000K (RA80)	1037Lm/m	1037Lm/m

LW2835-WN60-12V/24V-10MM

- Safety voltage,resistance control current
- 60LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA80)	1130 Lm/m	1130 Lm/m
3000K (RA80)	1150Lm/m	1150Lm/m
4000K (RA80)	1200Lm/m	1200Lm/m
6000K (RA80)	1250Lm/m	1250Lm/m

LW2835-WN120 -12V/24V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	25MM	50MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	14.4W/m	14.4W/m
Luminous flux		
2700K (RA80)	1372 Lm/m	1372 Lm/m
3000K (RA80)	1400Lm/m	1400Lm/m
4000K (RA80)	1470Lm/m	1470Lm/m
6000K (RA80)	1512Lm/m	1512Lm/m



LW2835-WN120-12V/24V-8MM-1led cutting

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:

LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	8.33MM	8.33MM
Cutting Unit	1 LEDS	1 LEDS
Power/M	9W/m	9W/m
Luminous flux		
2700K (RA80)	882Lm/m	882Lm/m
3000K (RA80)	900Lm/m	900Lm/m
4000K (RA80)	945Lm/m	945Lm/m
6000K (RA80)	972Lm/m	972Lm/m

LW2835-WN180-12V/24V-8MM

- Safety voltage,resistance control current
- 180LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:

LED Type	SMD2835	SMD2835
LEDs/Meter	180LEDs/m	180LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	16.67MM	33.3MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	15W/m	15W/m
Luminous flux		
2700K (RA80)	1470 Lm/m	1470 Lm/m
3000K (RA80)	1500Lm/m	1500Lm/m
4000K (RA80)	1575Lm/m	1575Lm/m
6000K (RA80)	1620Lm/m	1620Lm/m

LW2835-WN156-12V/24V-8MM

- Safety voltage,resistance control current
- 156LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:

LED Type	SMD2835	SMD2835
LEDs/Meter	156LEDs/m	156LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	19.2MM	38.4MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA80)	1176 Lm/m	1176 Lm/m
3000K (RA80)	1200Lm/m	1200Lm/m
4000K (RA80)	1260Lm/m	1260Lm/m
6000K (RA80)	1296Lm/m	1296Lm/m

LW2835-WN180-24V-10MM

- Safety voltage,resistance control current
- 180LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:

LED Type	SMD2835
LEDs/Meter	180LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	33.33MM
Cutting Unit	6 LEDS
Power/M	12W/m
Luminous flux	
2700K (RA80)	1200Lm/m
3000K (RA80)	1260Lm/m
4000K (RA80)	1320Lm/m
6000K (RA80)	1380Lm/m



LW2835-WN192-24V-10MM

- Safety voltage,resistance control current
- 192LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	192LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	31.25MM
Cutting Unit	6 LEDS
Power/M	14W/m
Luminous flux	
2700K (RA80)	1400Lm/m
3000K (RA80)	1470Lm/m
4000K (RA80)	1540Lm/m
6000K (RA80)	1610Lm/m

LW2835-WN240-12V/24V-10MM

- Safety voltage,resistance control current
- 240LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	12.5MM	25MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	19.2W/m	19.2W/m
Luminous flux		
2700K (RA80)	1881.6Lm/m	1881.6Lm/m
3000K (RA80)	1920Lm/m	1920Lm/m
4000K (RA80)	2016Lm/m	2016Lm/m
6000K (RA80)	2073.6Lm/m	2073.6Lm/m



LW2835-WN240-12V/24V-12MM

- Safety voltage,resistance control current
- 240LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	12.5MM	25MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	20W/m	20W/m
Luminous flux		
2700K (RA80)	1960Lm/m	1960Lm/m
3000K (RA80)	2000Lm/m	2000Lm/m
4000K (RA80)	2100Lm/m	2100Lm/m
6000K (RA80)	2160Lm/m	2160Lm/m

LW2835-WN240-12V/24V-16MM

- Safety voltage,resistance control current
- 240LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	16MM	16MM
Cutting length	25MM	25MM
Cutting Unit	6 LEDS	6 LEDS
Power/M	24W/m	24W/m
Luminous flux		
2700K (RA80)	2353Lm/m	2353Lm/m
3000K (RA80)	2400Lm/m	2400Lm/m
4000K (RA80)	2520Lm/m	2520Lm/m
6000K (RA80)	2590Lm/m	2590Lm/m



LW2835-WN240-12V/24V-15MM

- Safety voltage,resistance control current
- 240LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	15MM	15MM
Cutting length	25MM	25MM
Cutting Unit	6 LEDS	6 LEDS
Power/M	20W/m	20W/m
Luminous flux		
2700K (RA80)	1960Lm/m	1960Lm/m
3000K (RA80)	2000Lm/m	2000Lm/m
4000K (RA80)	2100Lm/m	2100Lm/m
6000K (RA80)	2160Lm/m	2160Lm/m

LW2835-WN360-24V-30MM

- Safety voltage,resistance control current
- 360LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	360LEDs/m
Input Voltage	DC24V
PCB width	30MM
Cutting length	50MM
Cutting Unit	18LEDs
Power/M	28W/m
Luminous flux	
2700K (RA80)	2744Lm/m
3000K (RA80)	2800Lm/m
4000K (RA80)	2940Lm/m
6000K (RA80)	3024Lm/m

LW2835-WN360-24V-20MM

- Safety voltage,resistance control current
- 360LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	360LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	16.67MM
Cutting Unit	6 LEDS
Power/M	24W/m
Luminous flux	
2700K (RA80)	2352Lm/m
3000K (RA80)	2400Lm/m
4000K (RA80)	2520Lm/m
6000K (RA80)	2592Lm/m

LW2835-WN384-24V-30MM

- Safety voltage,resistance control current
- 384LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	384LEDs/m
Input Voltage	DC24V
PCB width	30MM
Cutting length	62.5MM
Cutting Unit	24LEDs
Power/M	30W/m
Luminous flux	
2700K (RA80)	2940Lm/m
3000K (RA80)	3000Lm/m
4000K (RA80)	3150Lm/m
6000K (RA80)	3240Lm/m



LW2835-WN480-24V-40MM

- Safety voltage,resistance control current
- 480LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+ /CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	480LEDs/m
Input Voltage	DC24V
PCB width	40MM
Cutting length	62.5MM
Cutting Unit	30LEDS
Power/M	40W/m
Luminous flux	
2700K (RA80)	3920Lm/m
3000K (RA80)	4000Lm/m
4000K (RA80)	4200Lm/m
6000K (RA80)	4320Lm/m

LW2835-WN576-24V-30MM

- Safety voltage,resistance control current
- 576LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+ /CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	576LEDs/m
Input Voltage	DC24V
PCB width	30MM
Cutting length	13.9MM
Cutting Unit	8LEDS
Power/M	32W/m
Luminous flux	
2700K (RA80)	3136Lm/m
3000K (RA80)	3200Lm/m
4000K (RA80)	3360Lm/m
6000K (RA80)	3456Lm/m

LW2216-WN120-24V-8MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD2216
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	50MM
Cutting Unit	6 LEDS
Power/M	9W/m
Luminous flux	
2700K (RA90)	783Lm/m
3000K (RA90)	801Lm/m
4000K (RA90)	828Lm/m
6000K (RA90)	864Lm/m

LW2216-WN120-12V/24V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available




Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	25MM	50MM
Cutting Unit	3LEDS	6 LEDS
Power/M	9.6W/m	9.6W/m
Luminous flux		
2700K (RA90)	835Lm/m	835Lm/m
3000K (RA90)	854Lm/m	854Lm/m
4000K (RA90)	883Lm/m	883Lm/m
6000K (RA90)	922Lm/m	922Lm/m



LW2216-WN180-12V/24V-10MM


- Safety voltage,resistance control current
- 180LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available

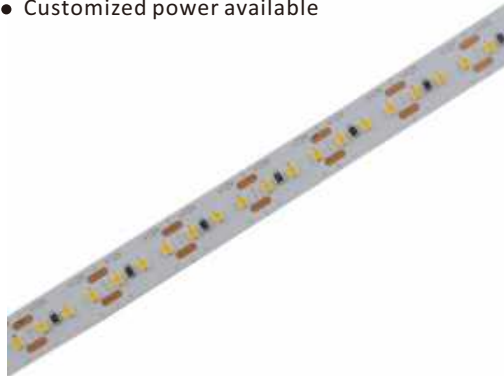

Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	180LEDs/m	180LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	16.67MM	33.3MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	14W/m	14W/m
Luminous flux		
2700K (RA90)	1218Lm/m	1218Lm/m
3000K (RA90)	1246Lm/m	1246Lm/m
4000K (RA90)	1288Lm/m	1288Lm/m
6000K (RA90)	1344Lm/m	1344Lm/m

LW2216-WN240-12V/24V-10MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available

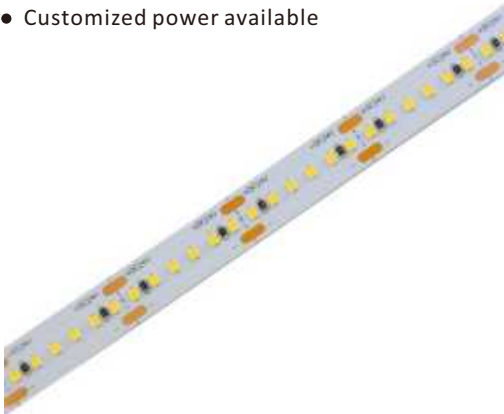

Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	12.5MM	25MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	14.4W/m	14.4W/m
Luminous flux		
2700K (RA90)	1253Lm/m	1253Lm/m
3000K (RA90)	1282Lm/m	1282Lm/m
4000K (RA90)	1325Lm/m	1325Lm/m
6000K (RA90)	1382Lm/m	1382Lm/m



LW2216-WN300-12V/24V/10MM

- Safety voltage, resistance control current
- 300LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	300LEDs/m	300LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	10MM	20MM
Cutting Unit	3LEDS	6 LEDS
Power/M	16.8W/m	16.8W/m
Luminous flux		
2700K (RA90)	1462Lm/m	1462Lm/m
3000K (RA90)	1495Lm/m	1495Lm/m
4000K (RA90)	1546Lm/m	1546Lm/m
6000K (RA90)	1613Lm/m	1613Lm/m

LW2110-WN204-24V-10MM

- Safety voltage, resistance control current
- 204LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



24V
DC

white

Product features:	
LED Type	SMD2110
LEDs/Meter	204LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	29.4MM
Cutting Unit	6 LEDS
Power/M	15W/m
Luminous flux	
2700K (RA90)	1305Lm/m
3000K (RA90)	1335Lm/m
4000K (RA90)	1380Lm/m
6000K (RA90)	1440Lm/m



LW2110-WN280-24V-10MM

- Safety voltage, resistance control current
- 280LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



24V
DC

white

Product features:	
LED Type	SMD2110
LEDs/Meter	280LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	25MM
Cutting Unit	7 LEDS
Power/M	16W/m
Luminous flux	
2700K (RA90)	1440Lm/m
3000K (RA90)	1456Lm/m
4000K (RA90)	1488Lm/m
6000K (RA90)	1552Lm/m

LW5050-WN30-12V/24V-10MM

- Safety voltage, resistance control current
- 30LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	30LEDs/m	30LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	100MM	166.7MM
Cutting Unit	3 LEDS	5LEDS
Power/M	7.2W/m	7.2W/m
Luminous flux		
2700K (RA80)	684 Lm/m	684 Lm/m
3000K (RA80)	698Lm/m	698Lm/m
4000K (RA80)	720Lm/m	720Lm/m
6000K (RA80)	756Lm/m	756Lm/m



LW5050-WN48-12V-10MM

- Safety voltage,resistance control current
- 48LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

white

color

Product features:		
LED Type	SMD5050	
LEDs/Meter	48LEDs/m	
Input Voltage	DC12V	
PCB width	10MM	
Cutting length	62.5MM	
Cutting Unit	3 LEDS	
Power/M	10W/m	
Luminous flux		
2700K (RA80)	950 Lm/m	
3000K (RA80)	970Lm/m	
4000K (RA80)	1000Lm/m	
6000K (RA80)	1050Lm/m	

LW5050-WN96 -24V-12.5MM

- Safety voltage,resistance control current
- 96LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

color

Product features:		
LED Type	SMD5050	
LEDs/Meter	96LEDs/m	
Input Voltage	DC24V	
PCB width	12.5MM	
Cutting length	62.5MM	
Cutting Unit	6 LEDS	
Power/M	18W/m	
Luminous flux		
2700K (RA80)	1710 Lm/m	
3000K (RA80)	1750Lm/m	
4000K (RA80)	1800Lm/m	
6000K (RA80)	1850Lm/m	

LW5050-WN60-12V/24V-10MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	13W/m	13W/m
Luminous flux		
2700K (RA80)	1230 Lm/m	1230 Lm/m
3000K (RA80)	1260Lm/m	1260Lm/m
4000K (RA80)	1300Lm/m	1300Lm/m
6000K (RA80)	1365Lm/m	1365Lm/m

LW5050-WN120-12V/24V-15MM/18MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	15MM	18MM
Cutting length	50MM	50MM
Cutting Unit	6 LEDS	6 LEDS
Power/M	16.8W/m	19.2W/m
Luminous flux		
2700K (RA80)	1600 Lm/m	1820 Lm/m
3000K (RA80)	1630Lm/m	1860Lm/m
4000K (RA80)	1680Lm/m	1920Lm/m
6000K (RA80)	1750Lm/m	2000Lm/m



LW3014-WN60-12V/24V-8MM/10MM


- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	6W/m	6W/m
Luminous flux		
2700K (RA80)	570 Lm/m	570 Lm/m
3000K (RA80)	582Lm/m	582Lm/m
4000K (RA80)	630Lm/m	630Lm/m
6000K (RA80)	648Lm/m	648Lm/m

LW3014-WN70-24V-10MM

- Safety voltage,resistance control current
- 70LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available

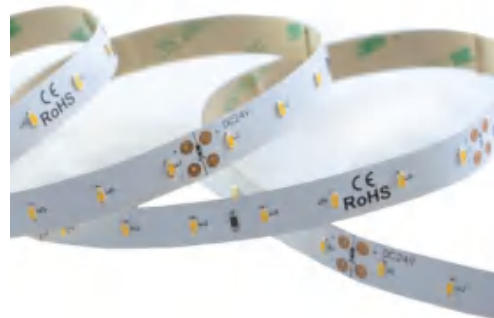

Product features:	
LED Type	SMD3014
LEDs/Meter	70LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	7LEDS
Power/M	7W/m
Luminous flux	
2700K (RA80)	686 Lm/m
3000K (RA80)	700Lm/m
4000K (RA80)	735Lm/m
6000K (RA80)	756Lm/m



LW3014-WN120-12V/24V-8MM/10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	10MM
Cutting length	25MM	50MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	9W/m	12W/m
Luminous flux		
2700K (RA80)	855 Lm/m	1176 Lm/m
3000K (RA80)	873Lm/m	1200Lm/m
4000K (RA80)	900Lm/m	1260Lm/m
6000K (RA80)	945Lm/m	1290Lm/m

LW3014-WN140-24V-10MM

- Safety voltage,resistance control current
- 140LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD3014
LEDs/Meter	140LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	7LEDS
Power/M	14W/m
Luminous flux	
2700K (RA80)	1372 Lm/m
3000K (RA80)	1400Lm/m
4000K (RA80)	1470Lm/m
6000K (RA80)	1512Lm/m



LW3014-WN204-24V-10MM

- Safety voltage,resistance control current
- 204LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

color

Product features:		
LED Type	SMD3014	
LEDs/Meter	204LEDs/m	
Input Voltage	DC24V	
PCB width	10MM	
Cutting length	29.4MM	
Cutting Unit	6LEDS	
Power/M	16.8W/m	
Luminous flux		
2700K (RA80)	1596Lm/m	
3000K (RA80)	1629.6Lm/m	
4000K (RA80)	1680Lm/m	
6000K (RA80)	1764Lm/m	

LW3014-WN240-12V/24V-10MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	12.5MM	25MM
Cutting Unit	3LEDS	6LEDS
Power/M	19.2W/m	19.2W/m
Luminous flux		
2700K (RA80)	1824Lm/m	1824Lm/m
3000K (RA80)	1862Lm/m	1862Lm/m
4000K (RA80)	1920Lm/m	1920Lm/m
6000K (RA80)	2016Lm/m	2016Lm/m



LW5730-WN60-24V-12MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.5mm
- Color temperature can choose the nine optional of 2200K-10000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

Product features:		
LED Type	SMD5730	
LEDs/Meter	60LEDs/m	
Input Voltage	DC24V	
PCB width	12MM	
Cutting length	100MM	
Cutting Unit	6 LEDS	
Power/M	18W/m	
Luminous flux		
2700K (RA80)	1710Lm/m	
3000K (RA80)	1746Lm/m	
4000K (RA80)	1800Lm/m	
6000K (RA80)	1890Lm/m	

LW5730-WN60-12V/24V-10MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.5mm
- Color temperature can choose the nine optional of 2200K-10000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

Product features:		
LED Type	SMD5730	SMD5730
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	15W/m	15W/m
Luminous flux		
2700K (RA80)	1425Lm/m	1425Lm/m
3000K (RA80)	1455Lm/m	1455Lm/m
4000K (RA80)	1500Lm/m	1500Lm/m
6000K (RA80)	1575Lm/m	1575Lm/m



LW5730-WN120-24V-20MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.5mm
- Color temperature can choose the nine optional of 2200K-10000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

Product features:

LED Type	SMD5730
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	20MM
Cutting length	50MM
Cutting Unit	6 LEDS
Power/M	24W/m
Luminous flux	
2700K (RA80)	2280Lm/m
3000K (RA80)	2328Lm/m
4000K (RA80)	2400Lm/m
6000K (RA80)	2520Lm/m

LW2835-WN60-5V-5MM-1led cutting

- Safety voltage,resistance control current
- 60LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



5V
DC

white

color

Product features:

LED Type	SMD2835
LEDs/Meter	60LEDs/m
Input Voltage	DC5V
PCB width	5MM
Cutting length	16.67MM
Cutting Unit	1 LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	480 Lm/m
3000K (RA80)	492Lm/m
4000K (RA80)	510Lm/m
6000K (RA80)	540Lm/m

LW2835-WN120-5V-5MM-1led cutting

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



5V
DC

white

color

Product features:

LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC5V
PCB width	5MM
Cutting length	8.33MM
Cutting Unit	1 LEDS
Power/M	5W/m
Luminous flux	
2700K (RA80)	400 Lm/m
3000K (RA80)	410Lm/m
4000K (RA80)	425Lm/m
6000K (RA80)	450Lm/m

LW2835-WN120-5V-8MM-1led cutting

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC5V
PCB width	8MM
Cutting length	8.33MM
Cutting Unit	1 LEDS
Power/M	9W/m
Luminous flux	
2700K (RA80)	720 Lm/m
3000K (RA80)	738Lm/m
4000K (RA80)	765Lm/m
6000K (RA80)	810Lm/m

LW2835-WN120-CCT-5V-5MM-2led cutting

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC5V
PCB width	5MM
Cutting length	16.67MM
Cutting Unit	2 LEDS
Power/M	12W/m
Luminous flux (RA80)	1020Lm/m



LW2835-WN60 -12V-S-6MM

- Safety voltage,resistance control current
- 60LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	60LEDs/m
Input Voltage	DC12V
PCB width	6MM
Cutting length	50MM
Cutting Unit	3LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	588Lm/m
3000K (RA80)	600Lm/m
4000K (RA80)	630Lm/m
6000K (RA80)	648Lm/m

LW2835-WN96-12V/24V-S-6MM

- Safety voltage,resistance control current
- 96LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	96LEDs/m	96LEDs/m
Input Voltage	DC12V	DC24V
PCB width	6MM	6MM
Cutting length	31.2MM	62.5MM
Cutting Unit	3LEDS	6LEDS
Power/M	9W/m	9W/m
Luminous flux		
2700K (RA80)	882Lm/m	882Lm/m
3000K (RA80)	900Lm/m	900Lm/m
4000K (RA80)	945Lm/m	945Lm/m
6000K (RA80)	972Lm/m	972Lm/m



LW2835-WN120 -12V/24V-S-6.5MM

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	6.5MM	6.5MM
Cutting length	50MM	50MM
Cutting Unit	6LEDS	6LEDS
Power/M	8W/m	8W/m
Luminous flux		
2700K (RA80)	784Lm/m	784Lm/m
3000K (RA80)	800Lm/m	800Lm/m
4000K (RA80)	840Lm/m	840Lm/m
6000K (RA80)	864Lm/m	864Lm/m

LW2835-WN120 -24V-S-10MM

- Safety voltage,resistance control current
- 120LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	10W/m
Luminous flux	
2700K (RA80)	980Lm/m
3000K (RA80)	1000Lm/m
4000K (RA80)	1050Lm/m
6000K (RA80)	1080Lm/m



LW5050-WN42-RGB-12V-S-12MM

- Safety voltage,resistance control current
- 42LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V
DC

RGB

Product features:	
LED Type	SMD5050
LEDs/Meter	42LEDs/m
Input Voltage	DC12V
PCB width	12MM
Cutting length	71.4MM
Cutting Unit	3LEDS
Power/M	8W/m
Wavelength	Red(620-625nm)
	Green(520-525nm)
	Blue(465-470nm)

LW5050-WN48-RGB-12V-S-8MM

- Safety voltage,resistance control current
- 48LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V
DC

RGB

Product features:	
LED Type	SMD5050
LEDs/Meter	48LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	62.5MM
Cutting Unit	3LEDS
Power/M	8W/m
Wavelength	Red(620-625nm)
	Green(520-525nm)
	Blue(465-470nm)



LW5050-4WN48 -RGBW-512-24V-S-12MM

- Safety voltage, 512 constant current drive IC
- 48LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	48LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	125MM
Cutting Unit	6LEDS
Power/M	13W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)

LW5050-4WN48-RGBW-24V-S-12MM

- Safety voltage,resistance control current
- 48LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	48LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	12.5MM
Cutting Unit	6LEDS
Power/M	12W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)



LW2835-2WN60-CCT-24V-S-8MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.2mm
- 2in1 LED, The two colors blend better
- CRI 80+ / CRI 90+ / CRI 95+ are available
- Customized power available



24V
DC

white

CCT

Product features:

LED Type	SMD2835
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	100MM
Cutting Unit	6LEDS
Power/M	10W/m
Luminous flux (RA80)	1050Lm/m

LW3014-WN60-12V-5MM-side view

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the eight optional of 2400K-7000K white light
- CRI 80+
- Customized power available



12V
DC

white

Product features:

LED Type	SMD3014
LEDs/Meter	60LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	50MM
Cutting Unit	3LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	540Lm/m
3000K (RA80)	552Lm/m
4000K (RA80)	570Lm/m
6000K (RA80)	588Lm/m

LW3014-WN120-12V/24V-8MM-side view

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the eight optional of 2400K-7000K white light
- CRI 80+
- Customized power available



12V
DC

24V
DC

white

Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	25MM	50MM
Cutting Unit	3LEDS	6LEDS
Power/M	9W/m	9W/m
Luminous flux		
2700K (RA80)	810Lm/m	810Lm/m
3000K (RA80)	828Lm/m	828Lm/m
4000K (RA80)	855Lm/m	855Lm/m
6000K (RA80)	882Lm/m	882Lm/m

LW3014-WN180-CCT-12V-8MM-Side View

- Safety voltage,resistance control current
- 180LEDs/m with slim thickness of 1.4mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

white

CCT

Product features:	
LED Type	SMD3014
LEDs/Meter	180LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	33.3MM
Cutting Unit	6LEDS
Power/M	16W/m
Luminous flux (RA80)	1520Lm/m



IR/UV/Plant Grow LED Strip Series



Model:**LW3528-WN60-IR850/940**
LED QTY/M:60 leds/m
Volt(V):12V/24V
Power W/M:4.8W/M
Wave Length:850nm/940nm
PCB Width:8mm
Cutting Unit: 50mm/100mm
IP Rate:IP20/IP65/IP67/IP68
Color: ---




Model:**LW2835-WN60-IR850/940**
LED QTY/M:60 leds/m
Volt(V):12V/24V
Power W/M:12W/M
Wave Length:850nm/940nm
PCB Width:8mm/10mm
Cutting Unit: 50mm/100mm
IP Rate:IP20/IP65/IP67/IP68
Color: ---



Model:**LW5050-WN60-IR850/940**
LED QTY/M:60 leds/m
Volt(V):12V/24V
Power W/M:14.4W/M
Wave Length:850nm/940nm
PCB Width:10mm
Cutting Unit: 50mm/100mm
IP Rate:IP20/IP65/IP67/IP68
Color: ---



Model:**LW3528-WN120-UV365/380**
LED QTY/M:120 leds/m
Volt(V):12V/24V
Power W/M:9.6W/M
Wave Length:365-370nm/380-385nm
PCB Width:8mm
Cutting Unit: 25mm/50mm
IP Rate:IP20/IP65/IP67/IP68
Color:




Model:**LW2835-WN120-UV365/380**
LED QTY/M:120 leds/m
Volt(V):12V/24V
Power W/M:24W/M
Wave Length:365-370nm/380-385nm
PCB Width:8mm/10mm
Cutting Unit: 25mm/50mm
IP Rate:IP20/IP65/IP67/IP68
Color:



Model:**LW5050-WN60-UV365/380**
LED QTY/M:60 leds/m
Volt(V):12V/24V
Power W/M:14.4W/M
Wave Length:365-370nm/380-385nm
PCB Width:10mm
Cutting Unit: 50mm/100mm
IP Rate:IP20/IP65/IP67/IP68
Color:



Model:**LW2835-WN120-PG660450470**
LED QTY/M:120 leds/m
Volt(V):12V/24V
Power W/M:24W/M
Wave Length:660nm/450nm/470nm
PCB Width:8mm/10mm
Cutting Unit: 25mm/50mm
IP Rate:IP20/IP65/IP67/IP68
Color:



Model:**LW5050-WN60-PG660450470**
LED QTY/M:60 leds/m
Volt(V):12V/24V
Power W/M:14.4W/M
Wave Length:660nm/450nm/470nm
PCB Width:10mm
Cutting Unit: 50mm/100mm
IP Rate:IP20/IP65/IP67/IP68
Color:



CCT Adjustable LED Strip Series



LW5050-WN120-CCT-24V-18MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 2.1mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD5050
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	18MM
Cutting length	100MM
Cutting Unit	12LEDS
Power/M	20W/m
Luminous flux (RA80)	2000Lm/m

LW3014-WN224-CCT-24V-10MM

- Safety voltage,resistance control current
- 224LEDs/m with slim thickness of 1.8mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD3014
LEDs/Meter	224LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	62.5MM
Cutting Unit	14LEDS
Power/M	16W/m
Luminous flux (RA80)	1680Lm/m

LW3014-WN140-CCT-24V-12MM

- Safety voltage,resistance control current
- 140LEDs/m with slim thickness of 1.4mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD3014
LEDs/Meter	140LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	100MM
Cutting Unit	14LEDS
Power/M	14W/m
Luminous flux (RA80)	1470Lm/m

LW2835-WN120-CCT-12V/24V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

CCT

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	6LEDS	12LEDS
Power/M	18W/m	18W/m
Luminous flux (RA80)	1890Lm/m	1890Lm/m



LW2835-WN120-CCT-12V-5MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	12W/m
Luminous flux (RA80)	1260Lm/m

LW2835-WN120-CCT-12V/24V-8MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	50MM	100MM
Cutting Unit	6LEDS	12LEDS
Power/M	16W/m	16W/m
Luminous flux (RA80)	1680Lm/m	1680Lm/m

LW2835-WN120-CCT-12V/24V-5MM-2led cutting

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	16.67MM	16.67MM
Cutting Unit	2LEDS	2LEDS
Power/M	12W/m	12W/m
Luminous flux (RA80)	1260Lm/m	1260Lm/m

LW2835-WN144-CCT-24V-5MM

- Safety voltage,resistance control current
- 144LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	144LEDs/m
Input Voltage	DC24V
PCB width	5MM
Cutting length	83.33MM
Cutting Unit	12LEDS
Power/M	13W/m
Luminous flux (RA80)	1365Lm/m



LW2835-WN156-CCT-12V-5MM

- Safety voltage,resistance control current
- 156LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized poweravailable



12V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	156LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	19.2MM
Cutting Unit	6LEDS
Power/M	13W/m
Luminous flux (RA80)	1365Lm/m

LW2835-WN168-CCT-12V/24V-8MM

- Safety voltage,resistance control current
- 168LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

CCT

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	168LEDs/m	168LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	35.7MM	71.4MM
Cutting Unit	6LEDS	12LEDS
Power/M	15W/m	15W/m
Luminous flux (RA80)	1575Lm/m	1575Lm/m

LW2835-WN156-CCT-12V-8MM

- Safety voltage,resistance control current
- 156LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	156LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	19.2MM
Cutting Unit	6LEDS
Power/M	14W/m
Luminous flux (RA80)	1470Lm/m

LW2835-WN192-CCT-12V/24V-8MM

- Safety voltage,resistance control current
- 192LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

CCT

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	192LEDs/m	192LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	31.2MM	62.5MM
Cutting Unit	6LEDS	12LEDS
Power/M	16W/m	16W/m
Luminous flux (RA80)	1680Lm/m	1680Lm/m



LW2835-WN240-CCT-12V/24V-10MM Double rows

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



12V
DC

24V
DC

white

CCT

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	25MM	50MM
Cutting Unit	6LEDS	12LEDS
Power/M	20W/m	20W/m
Luminous flux (RA80)	2100Lm/m	2100Lm/m

LW2835-WN240-CCT-24V-15MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	240LEDs/m
Input Voltage	DC24V
PCB width	15MM
Cutting length	50MM
Cutting Unit	12LEDS
Power/M	24W/m
Luminous flux (RA80)	2520Lm/m

LW2835-WN240-CCT-24V-10MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	240LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	41.67MM
Cutting Unit	10LEDS
Power/M	19.2W/m
Luminous flux (RA80)	2106Lm/m

LW2835-2WN120-CCT-12V-5MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- 2in1 LED, the two colors blend better
- CRI 80+ / CRI 90+ are available
- Customized power available



12V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	25MM
Cutting Unit	3LEDS
Power/M	12W/m
Luminous flux (RA80)	1260Lm/m



LW2835-2WN120-CCT-24V-8MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- 2in1 LED, the two colors blend better
- CRI 80+ / CRI 90+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	14W/m
Luminous flux (RA80)	1470Lm/m

LW2835-2WN156-CCT-12V-8MM

- Safety voltage,resistance control current
- 156LEDs/m with slim thickness of 1.2mm
- 2in1 LED, the two colors blend better
- CRI 80+ / CRI 90+ are available
- Customized power available



12V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	156LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	19.2MM
Cutting Unit	3LEDS
Power/M	16W/m
Luminous flux (RA80)	1680Lm/m

LW2835-2WN120-CCT-12V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- 2in1 LED, the two colors blend better
- CRI 80+ / CRI 90+ are available
- Customized power available



12V
DC

white

CCT

Product features:	
LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	10MM
Cutting length	25MM
Cutting Unit	3LEDS
Power/M	16W/m
Luminous flux (RA80)	1680Lm/m

LW3527-2WN120-CCT-24V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.4mm
- 2in1 LED, the two colors blend better
- CRI 80+ / CRI 90+ are available
- Customized power available



24V
DC

white

CCT

Product features:	
LED Type	SMD3527
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	16W/m
Luminous flux (RA80)	1400Lm/m



LW2216-WN240-CCT-24V-5MM

- Safety voltage, resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD2216
LEDs/Meter	240LEDs/m
Input Voltage	DC24V
PCB width	5MM
Cutting length	50MM
Cutting Unit	12 LEDS
Power/M	12W/m
Luminous flux (RA90)	1104Lm/m

LW2216-WN240-CCT-12V-8MM

- Safety voltage, resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD2216
LEDs/Meter	240LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	25MM
Cutting Unit	6 LEDS
Power/M	16W/m
Luminous flux (RA90)	1472Lm/m



LW2216-WN252-CCT-24V-10MM

- Safety voltage, resistance control current
- 252LEDs/m with slim thickness of 1.2mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD2216
LEDs/Meter	252LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	55.56MM
Cutting Unit	14 LEDS
Power/M	18W/m
Luminous flux (RA90)	1656Lm/m

LW3014-WN240-CCT-12V/24V-8MM-2 Wire Dual color

- Safety voltage, resistance control current
- 240LEDs/m with slim thickness of 1.4mm
- Two kinds of LED, can match any two kinds of color temperature.
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	8MM
Cutting length	25MM	50MM
Cutting Unit	6LEDS	12LEDS
Power/M	15W/m	15W/m
Luminous flux (RA80)	1575Lm/m	1575Lm/m





Constant Current LED Strip

LW2835-WN30-12V-10MM-HL

- Safety voltage,IC control current
- 30LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	30LEDs/m
Input Voltage	DC12V
PCB width	10MM
Cutting length	100MM
Cutting Unit	3 LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	588 Lm/m
3000K (RA80)	600Lm/m
4000K (RA80)	630Lm/m
6000K (RA80)	648Lm/m

LW2835-WN36-24V-10MM-HL

- Safety voltage,IC control current
- 36LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	36LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	166.7MM
Cutting Unit	6 LEDS
Power/M	7W/m
Luminous flux	
2700K (RA80)	686 Lm/m
3000K (RA80)	700Lm/m
4000K (RA80)	735Lm/m
6000K (RA80)	756Lm/m



LW2835-WN60-24V-10MM-HL

- Safety voltage,IC control current
- 60LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	6 LEDS
Power/M	8W/m
Luminous flux	
2700K (RA80)	784 Lm/m
3000K (RA80)	800Lm/m
4000K (RA80)	840Lm/m
6000K (RA80)	864Lm/m

LW2835-WN70-24V-10MM-HL

- Safety voltage,IC control current
- 70LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	70LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	7 LEDS
Power/M	7W/m
Luminous flux	
2700K (RA80)	686 Lm/m
3000K (RA80)	700Lm/m
4000K (RA80)	735Lm/m
6000K (RA80)	756Lm/m



LW2835-WN112-24V-10MM-HL

- Safety voltage,IC control current
- 112LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	112LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	62.5MM
Cutting Unit	7 LEDS
Power/M	9W/m
Luminous flux	
2700K (RA80)	882 Lm/m
3000K (RA80)	900Lm/m
4000K (RA80)	945Lm/m
6000K (RA80)	972Lm/m

LW2835-WN120-24V-8MM/10MM-HL

- Safety voltage,IC control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC24V	DC24V
PCB width	8MM	10MM
Cutting length	50MM	50MM
Cutting Unit	6 LEDS	6 LEDS
Power/M	9.6W/m	12W/m
Luminous flux		
2700K (RA80)	941 Lm/m	1176 Lm/m
3000K (RA80)	960Lm/m	1200Lm/m
4000K (RA80)	1008Lm/m	1260Lm/m
6000K (RA80)	1037Lm/m	1296Lm/m



LW2835-WN140-24V-10MM-HL

- Safety voltage,IC control current
- 140LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	140LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	7 LEDS
Power/M	10W/m
Luminous flux	
2700K (RA80)	1380 Lm/m
3000K (RA80)	1400Lm/m
4000K (RA80)	1450Lm/m
6000K (RA80)	1500Lm/m

LW2835-WN144-24V-10MM-HL

- Safety voltage,IC control current
- 144LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	144LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	55.56MM
Cutting Unit	8 LEDS
Power/M	10W/m
Luminous flux	
2700K (RA80)	980 Lm/m
3000K (RA80)	1000Lm/m
4000K (RA80)	1050Lm/m
6000K (RA80)	1080Lm/m



LW2835-WN240-24V-12MM-HL

- Safety voltage,IC control current
- 240LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+ /CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	240LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	25MM
Cutting Unit	6 LEDS
Power/M	19.2W/m
Luminous flux	
2700K (RA80)	1882 Lm/m
3000K (RA80)	1920Lm/m
4000K (RA80)	2016Lm/m
6000K (RA80)	2074Lm/m

LW3014-WN60-24V-10MM-HL

- Safety voltage,IC control current
- 60LEDs/m with slim thickness of 1.4mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD3014
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	6 LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	570Lm/m
3000K (RA80)	582Lm/m
4000K (RA80)	600Lm/m
6000K (RA80)	630Lm/m



LW3014-WN70-24V-10MM-HL

- Safety voltage,IC control current
- 70LEDs/m with slim thickness of 1.4mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD3014
LEDs/Meter	70LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	7 LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	588Lm/m
3000K (RA80)	600Lm/m
4000K (RA80)	630Lm/m
6000K (RA80)	648Lm/m

LW3014-WN140-24V-10MM-HL

- Safety voltage,IC control current
- 140LEDs/m with slim thickness of 1.4mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD3014
LEDs/Meter	140LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	7 LEDS
Power/M	9W/m
Luminous flux	
2700K (RA80)	882Lm/m
3000K (RA80)	900Lm/m
4000K (RA80)	945Lm/m
6000K (RA80)	972Lm/m



LW5050-WN30-12V/24V-10MM-HL

- Safety voltage,IC control current
- 30LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2000K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	30LEDs/m	30LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	100MM	166.7MM
Cutting Unit	3 LEDS	5 LEDS
Power/M	7.2W/m	7.2W/m
Luminous flux		
2700K (RA80)	684Lm/m	684Lm/m
3000K (RA80)	698.4Lm/m	698.4Lm/m
4000K (RA80)	720Lm/m	720Lm/m
6000K (RA80)	756Lm/m	756Lm/m

LW5050-WN30-RGB-24V-10MM-HL

- Safety voltage,IC control current
- 30LEDs/m with slim thickness of 3.0mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB

Product features:	
LED Type	SMD5050
LEDs/Meter	30LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	166.7MM
Cutting Unit	5LEDS
Power/M	7.2W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW5050-WN60-12V/24V-10MM-HL

- Safety voltage,IC control current
- 60LEDs/m with slim thickness of 2.1mm
- Color temperature can choose the six optional of 2000K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	12W/m	12W/m
Luminous flux		
2700K (RA80)	1140Lm/m	1140Lm/m
3000K (RA80)	1164Lm/m	1164Lm/m
4000K (RA80)	1200Lm/m	1200Lm/m
6000K (RA80)	1260Lm/m	1260Lm/m

LW5050-WN60-RGBW-24V-12MM-HL

- Safety voltage,IC control current
- 60LEDs/m with slim thickness of 3.0mm
- Can be very good for mixing light, colorful color can choose the four optional of white light
- 5050 RGB LED and 5050 white LED
- Customized power available



24V
DC

RGBW

Product features:	
LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	166.7MM
Cutting Unit	10LEDS
Power/M	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)



LW5050-WN60-RGB-24V-10MM-HL

- Safety voltage,IC control current
- 60LEDs/m with slim thickness of3.0mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB


Product features:

LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	6LEDS
Power/M	12W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW5050-WN120-RGBW-24V-15MM-HL

- Safety voltage,IC control current
- 120LEDs/m with slim thickness of3.0mm
- Can be very good for mixing light, colorful color
can choose the four optional of wihte light
- 5050 RGB LED and 5050 white LED
- Customized power available

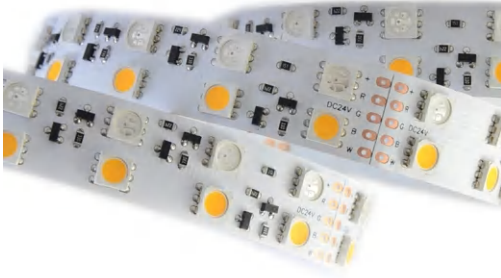

24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	15MM
Cutting length	100MM
Cutting Unit	12LEDS
Power/M	19.2W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)





PCB Width 3mm-5mm LED Strip

LW2835-WN60-12V/24V-5MM-1led cutting

- Safety voltage,resistance control current
- 60LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	16.67MM	16.67MM
Cutting Unit	1LEDS	1LEDS
Power/M	6W/m	6W/m
Luminous flux		
2700K (RA80)	588Lm/m	588Lm/m
3000K (RA80)	600Lm/m	600Lm/m
4000K (RA80)	630Lm/m	630Lm/m
6000K (RA80)	648Lm/m	648Lm/m

LW2835-WN120-12V/24V-5MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	25MM	50MM
Cutting Unit	3LEDS	6LEDS
Power/M	6W/m	6W/m
Luminous flux		
2700K (RA80)	588Lm/m	588Lm/m
3000K (RA80)	600Lm/m	600Lm/m
4000K (RA80)	630Lm/m	630Lm/m
6000K (RA80)	648Lm/m	648Lm/m



LW2835-WN156-12V/24V-5MM

- Safety voltage,resistance control current
- 156LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	156LEDs/m	156LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	19.2MM	38.4MM
Cutting Unit	3LEDS	6LEDS
Power/M	7W/m	7W/m
Luminous flux		
2700K (RA80)	686Lm/m	686Lm/m
3000K (RA80)	700Lm/m	700Lm/m
4000K (RA80)	735Lm/m	735Lm/m
6000K (RA80)	756Lm/m	756Lm/m

LW3014-WN60-24V-5MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD3014
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	5MM
Cutting length	100MM
Cutting Unit	6LEDS
Power/M	6W/m
Luminous flux	
2700K (RA80)	570Lm/m
3000K (RA80)	582Lm/m
4000K (RA80)	600Lm/m
6000K (RA80)	630Lm/m



LW3014-WN120-12V/24V-5MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.8mm
- Color temperature can choose the six optional of 2200K-6500K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

color

5mm

width

Product features:		
LED Type	SMD3014	SMD3014
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	25MM	50MM
Cutting Unit	3LEDS	6LEDS
Power/M	7W/m	7W/m
Luminous flux		
2700K (RA80)	665Lm/m	665Lm/m
3000K (RA80)	679Lm/m	679Lm/m
4000K (RA80)	714Lm/m	714Lm/m
6000K (RA80)	735Lm/m	735Lm/m

LW2216-WN120-12V/24V-5MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

5mm

width

Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	25MM	50MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	6W/m	6W/m
Luminous flux		
2700K (RA90)	522Lm/m	522Lm/m
3000K (RA90)	534Lm/m	534Lm/m
4000K (RA90)	552Lm/m	552Lm/m
6000K (RA90)	576Lm/m	576Lm/m



LW2216-WN180-12V-5MM

- Safety voltage,resistance control current
- 180LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



12V
DC

24V
DC

white

5mm

width

Product features:	
LED Type	SMD2216
LEDs/Meter	180LEDs/m
Input Voltage	DC12V
PCB width	5MM
Cutting length	16.67MM
Cutting Unit	3 LEDS
Power/M	7W/m
Luminous flux	
2700K (RA90)	609Lm/m
3000K (RA90)	623Lm/m
4000K (RA90)	644Lm/m
6000K (RA90)	672Lm/m

LW2216-WN240-12V/24V-5MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



12V
DC

24V
DC

白色white

5mm

宽度width

Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	5MM	5MM
Cutting length	12.5MM	25MM
Cutting Unit	3 LEDS	6 LEDS
Power/M	8W/m	8W/m
Luminous flux		
2700K (RA90)	696Lm/m	696Lm/m
3000K (RA90)	712Lm/m	712Lm/m
4000K (RA90)	736Lm/m	736Lm/m
6000K (RA90)	768Lm/m	768Lm/m



LW2110-WN196-24V-4MM

- Safety voltage,resistance control current
- 196LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



Product features:	
LED Type	SMD2110
LEDs/Meter	196LEDs/m
Input Voltage	DC24V
PCB width	4MM
Cutting length	35.7MM
Cutting Unit	7LEDS
Power/M	7W/m
Luminous flux	
2700K (RA90)	630Lm/m
3000K (RA90)	637Lm/m
4000K (RA90)	651Lm/m
6000K (RA90)	679Lm/m

LW2216-WN120-12V-4MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available



Product features:	
LED Type	SMD2216
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	4MM
Cutting length	25MM
Cutting Unit	3 LEDES
Power/M	6W/m
Luminous flux	
2700K (RA90)	522Lm/m
3000K (RA90)	534Lm/m
4000K (RA90)	552Lm/m
6000K (RA90)	576Lm/m



LW2835-WN120-12V/24V-3MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	3MM	3MM
Cutting length	25MM	50MM
Cutting Unit	3LEDS	6LEDS
Power/M	5W/m	5W/m
Luminous flux		
2700K (RA80)	490Lm/m	500Lm/m
3000K (RA80)	500Lm/m	525Lm/m
4000K (RA80)	525Lm/m	550Lm/m
6000K (RA80)	540Lm/m	575Lm/m

LW2216-WN240-12V/24V-3MM

- Safety voltage,resistance control current
- 240LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the ten optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



Product features:		
LED Type	SMD2216	SMD2216
LEDs/Meter	240LEDs/m	240LEDs/m
Input Voltage	DC12V	DC24V
PCB width	3MM	3MM
Cutting length	12.5MM	25MM
Cutting Unit	3 LEDES	6 LEDES
Power/M	5W/m	5W/m
Luminous flux		
2700K (RA90)	435Lm/m	435Lm/m
3000K (RA90)	445Lm/m	445Lm/m
4000K (RA90)	460Lm/m	460Lm/m
6000K (RA90)	480Lm/m	480Lm/m



RGB/RGBW/RGB CCT LED Strip



LW5050-WN30-RGB-12V/24V-10MM

- Safety voltage,resistance control current
- 30LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V DC 24V DC RGB

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	30LEDs/m	30LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	100MM	166.7MM
Cutting Unit	3LEDS	5LEDS
Power/M	7.2W/m	7.2W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)	

LW5050-WN60-RGB-12V/24V-10MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V DC 24V DC RGB

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3LEDS	6LEDS
Power/M	13W/m	13W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)	

LW5050-WN60-RGB-5V-10MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



5V DC RGB

Product features:	
LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC5V
PCB width	10MM
Cutting length	16.67MM
Cutting Unit	1LEDS
Power/M	13W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW5050-WN96-RGB-24V-10MM

- Safety voltage,resistance control current
- 96LEDs/m with slim thickness of 1.8mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V DC RGB

Product features:	
LED Type	SMD5050
LEDs/Meter	96LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	62.5MM
Cutting Unit	6LEDS
Power/M	16.8W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW4040-WN120-RGB-12V-6MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.7mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V
DC

RGB

Product features:	
LED Type	SMD4040
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	6MM
Cutting length	25MM
Cutting Unit	3LEDS
Power/M	12W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW4040-WN120-RGB-12V-8MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.7mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V
DC

RGB

Product features:	
LED Type	SMD4040
LEDs/Meter	120LEDs/m
Input Voltage	DC12V
PCB width	8MM
Cutting length	25MM
Cutting Unit	3LEDS
Power/M	14.4W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW4040-WN168-RGB-24V-8MM

- Safety voltage,resistance control current
- 168LEDs/m with slim thickness of 1.7mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB

Product features:	
LED Type	SMD4040
LEDs/Meter	168LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	41.67MM
Cutting Unit	7LEDS
Power/M	16.8W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW3838-WN112-RGB-24V-8MM

- Safety voltage,resistance control current
- 112LEDs/m with slim thickness of 1.7mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB

Product features:	
LED Type	SMD3838
LEDs/Meter	112LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	62.5MM
Cutting Unit	7LEDS
Power/M	14.4W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW3838-WN120-RGB-24V-6MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 1.7mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB

Product features:	
LED Type	SMD3838
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	6MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	12W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW3535-WN120-RGB-24V-10MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 3.0mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



24V
DC

RGB

Product features:	
LED Type	SMD3535
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	16.8W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW3535-WN60-RGB-12V/24V-8MM/10MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 3.0mm
- Can be very good for mixing light, colorful color
- 3in1 LED
- Customized power available



12V
DC

24V
DC

RGB

Product features:		
LED Type	SMD3535	SMD3535
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	8MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3LEDS	6LEDS
Power/M	10W/m	10W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)	

LW5050-WN60-RGBW-12V/24V-12MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
The choice of white color can be like the 5050 strip
- 5050 RGB LED and 5050 white LED
- Customized power available



12V
DC

24V
DC

RGBW

Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	100MM	166.7MM
Cutting Unit	6LEDS	10LEDS
Power/M	14.4W/m	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)	



LW5050-WN120-RGBW-24V-15MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
The choice of white color can be like the 5050 strip
- 5050 RGB LED and 5050 white LED
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	15MM
Cutting length	100MM
Cutting Unit	12LEDS
Power/M	19.2W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)

LW5050-4WN60-RGBW-12V/24V-12MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



12V
DC

24V
DC

RGBW

Product features:

LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	50MM	100MM
Cutting Unit	3LEDS	6LEDS
Power/M	14.4W/m	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)	



LW5050-4WN72-RGBW-12V/24V-12MM

- Safety voltage,resistance control current
- 72LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



12V
DC

24V
DC

RGBW

Product features:

LED Type	SMD5050	SMD5050
LEDs/Meter	72LEDs/m	72LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	41.67MM	83.33MM
Cutting Unit	3LEDS	6LEDS
Power/M	16.8W/m	16.8W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)	

LW5050-4WN84-RGBW-24V-12MM

- Safety voltage,resistance control current
- 84LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color
can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	84LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	71.4MM
Cutting Unit	6LEDS
Power/M	18W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)



LW5050-4WN96-RGBW-24V-12MM

- Safety voltage,resistance control current
- 96LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050
LEDs/Meter	96LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	62.5MM
Cutting Unit	6LEDs
Power/M	19.2W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)

LW5050+2835-WN120-RGBW-24V-12MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color The choice of white color can be like the 2835 strip
- 5050 RGB LED and 2835 white LED
- Customized power available



24V
DC

RGBW

Product features:

LED Type	SMD5050+2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	100MM
Cutting Unit	12LEDs
Power/M	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)

LW5050-4WN120-RGBW-12V/24V-12MM

- Safety voltage,resistance control current
- 120LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the four optional of white light
- 4in1 RGBW LED
- Customized power available



12V
DC

24V
DC

RGBW

Product features:

LED Type	SMD5050	SMD5050
LEDs/Meter	120LEDs/m	120LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	25MM	50MM
Cutting Unit	3LEDs	6LEDs
Power/M	20W/m	20W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)	

LW5050-5WN60-RGBCCT-12V/24V-12MM

- Safety voltage,resistance control current
- 60LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the CCT color:2700K+6000K
- 5in1 RGB CCT LED
- Customized power available



12V
DC

24V
DC

RGBCCT

Product features:

LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	50MM	100MM
Cutting Unit	3LEDs	6LEDs
Power/M	14.4W/m	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) WarmWhite(2700K) White(6000K)	



LW5050-5WN84-RGBCCT-24V-12MM

- Safety voltage,resistance control current
- 84LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the CCT color:2700K+6000K
- 5in1 RGB CCT LED
- Customized power available



24V
DC

RGBCCT

Product features:

LED Type	SMD5050
LEDs/Meter	84LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	71.4MM
Cutting Unit	6LEDS
Power/M	18W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) WarmWhite(2700K) White(6000K)

LW5050-5WN96-RGBCCT-24V-12MM

- Safety voltage,resistance control current
- 96LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color can choose the CCT color:2700K+6000K
- 5in1 RGB CCT LED
- Customized power available



24V
DC

RGBCCT

Product features:

LED Type	SMD5050
LEDs/Meter	96LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	62.5MM
Cutting Unit	6LEDS
Power/M	19.2W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) WarmWhite(2700K) White(6000K)



LW5050+2835-WN180-RGB+CCT-24V-12MM

- Safety voltage,resistance control current
- 180LEDs/m with slim thickness of 2.1mm
- Can be very good for mixing light, colorful color The choice of white color can be like the 2835 strip
- 5050 RGB LED and 2835 white LED
- Customized power available



24V
DC

RGBCCT

Product features:

LED Type	SMD5050+2835
LEDs/Meter	180LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	100MM
Cutting Unit	18LEDS
Power/M	14.4W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) Warm White(2700K) White(6000K)



Magic(Digital) LED Strip



LW5050-WN30-RGB-2811/1903-12V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 30LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



12V
DC

RGB

Product features:

LED Type	SMD5050
LEDs/Meter	30LEDs/m
Input Voltage	DC12V
PCB width	10MM
Cutting length	100MM
Cutting Unit	3LEDS
Power/M	7.2W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW5050-WN48-RGB-2811/1903-12V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 48LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



12V
DC

RGB

Product features:

LED Type	SMD5050
LEDs/Meter	48LEDs/m
Input Voltage	DC12V
PCB width	10MM
Cutting length	62.5MM
Cutting Unit	3LEDS
Power/M	11W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW5050-WN60-RGB-2811/1903-12V/24V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 60LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



12V
DC

24V
DC

RGB

Product features:

LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	10MM	10MM
Cutting length	50MM	100MM
Cutting Unit	3LEDS	6LEDS
Power/M	13W/m	13W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)	

LW5050-WN60-RGB-1935-24V-10MM

- Safety voltage, 1935 constant current drive IC
- 60LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



24V
DC

RGB

Product features:

LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	6LEDS
Power/M	13W/m
波长Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW5050-WN60-RGB-2812-5V-10MM

- Safety voltage, 2812 constant current drive IC
- 60LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



Product features:	
LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC5V
PCB width	10MM
Cutting length	16.67MM
Cutting Unit	1LEDS
Power/M	12W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW5050-WN144-RGB-2812-5V-10MM

- Safety voltage, 2812 constant current drive IC
- 144LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024



Product features:	
LED Type	SMD5050
LEDs/Meter	144LEDs/m
Input Voltage	DC5V
PCB width	10MM
Cutting length	6.94MM
Cutting Unit	1LEDS
Power/M	28.8W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)



LW5050-4WN60-RGBW-2814-12V/24V-12MM

- Safety voltage, 2814 constant current drive IC
- 60LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



Product features:		
LED Type	SMD5050	SMD5050
LEDs/Meter	60LEDs/m	60LEDs/m
Input Voltage	DC12V	DC24V
PCB width	12MM	12MM
Cutting length	50MM	100MM
Cutting Unit	3LEDS	6LEDS
Power/M	16.8W/m	16.8W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)	

LW5050-4WN60 -RGBW-512-24V-12MM

- Safety voltage, 512 constant current drive IC
- 60LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



Product features:	
LED Type	SMD5050
LEDs/Meter	60LEDs/m
Input Voltage	DC24V
PCB width	12MM
Cutting length	100MM
Cutting Unit	6LEDS
Power/M	16.8W/m
Wavelength/CCT	Red(620-625nm) Green(520-525nm) Blue(465-470nm) White(2700K/3000K/4000K/6000K)



LW2835-WN120-RGB-1934-24V-6MM

- Safety voltage, 1934 constant current drive IC
- 120LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	6MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	10W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW2835-WN120-2811/1903-24V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 120LEDs/m with ultra-slim thickness of 1.2mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	10W/m
Luminous flux	
2700K (RA80)	980Lm/m
3000K (RA80)	1000Lm/m
4000K (RA80)	1050Lm/m
6000K (RA80)	1080Lm/m

LW3535-WN80-RGB-8808-12V-6MM

- Safety voltage, 8808 constant current drive IC
- 80LEDs/m with thickness of 3.0mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024



Product features:

LED Type	SMD3535
LEDs/Meter	80LEDs/m
Input Voltage	DC12V
PCB width	6MM
Cutting length	12.5MM
Cutting Unit	1LEDS
Power/M	12W/m
Wavelength	Red(620-625nm) Green(520-525nm) Blue(465-470nm)

LW2835-WN120-2811/1903-24V-8MM

- Safety voltage, 2811/1903 constant current drive IC
- 120LEDs/m with ultra-slim thickness of 1.2mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:

LED Type	SMD2835
LEDs/Meter	120LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	50MM
Cutting Unit	6LEDS
Power/M	9W/m
Luminous flux	
2700K (RA80)	882Lm/m
3000K (RA80)	900Lm/m
4000K (RA80)	945Lm/m
6000K (RA80)	972Lm/m



LW2835-WN120-2811/1903-24V-5MM

- Safety voltage, 2811/1903 constant current drive IC
- 120LEDs/m with ultra-slim thickness of 1.2mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+ /CRI 95+ are available
- Customized power available



24V
DC

white

color

Product features:		
LED Type	SMD2835	
LEDs/Meter	120LEDs/m	
Input Voltage	DC24V	
PCB width	5MM	
Cutting length	50MM	
Cutting Unit	6LEDS	
Power/M	7W/m	
Luminous flux		
2700K (RA80)	686Lm/m	
3000K (RA80)	700Lm/m	
4000K (RA80)	735Lm/m	
6000K (RA80)	756Lm/m	

LW2835-2WN120-CCT-2811/1903-24V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 120LEDs/m with ultra-slim thickness of 1.2mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- 2in1 LED strip,can match any two kinds of color temperature
- CRI 80+ and CRI 90+ are available
- Customized power available



LW2835-WN144-CCT-2811/1903-12V-10MM

- Safety voltage, 2811/1903 constant current drive IC
- 144LEDs/m with ultra-slim thickness of 1.2mm
- PWM control 256 grade brightness ,matching controller any color can be achieved
- The number of cascade points is 1024
- Two kinds of LED,can match any two kinds of color temperature
- CRI 80+ / CRI 90+ /CRI 95+ are available
- Customized power available



12V
DC

white

CCT

Product features:		
LED Type	SMD2835	
LEDs/Meter	144LEDs/m	
Input Voltage	DC12V	
PCB width	10MM	
Cutting length	125MM	
Cutting Unit	18LEDS	
Power/M	14W/m	
Luminous flux	1470Lm/m	
(RA80)		

24V
DC

white

CCT

Product features:		
LED Type	SMD2835	
LEDs/Meter	120LEDs/m	
Input Voltage	DC24V	
PCB width	10MM	
Cutting length	50MM	
Cutting Unit	6LEDS	
Power/M	12W/m	
Luminous flux	1260Lm/m	
(RA80)		



High Lumen Efficiency LED Strip



LW2835-WN70-24V-10MM

- Safety voltage,resistance control current
- 70LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	70LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	100MM
Cutting Unit	7LEDS
Power/M	7W/m
Luminous flux	
2700K (RA80)	966Lm/m
3000K (RA80)	980Lm/m
4000K (RA80)	1015Lm/m
6000K (RA80)	1050Lm/m

LW2835-WN80-24V-8MM

- Safety voltage,resistance control current
- 80LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	80LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	100MM
Cutting Unit	8LEDS
Power/M	7W/m
Luminous flux	
2700K (RA80)	1106Lm/m
3000K (RA80)	1120Lm/m
4000K (RA80)	1155Lm/m
6000K (RA80)	1190Lm/m



LW2835-WN126-24V-8MM/10MM

- Safety voltage,resistance control current
- 126LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	126LEDs/m	126LEDs/m
Input Voltage	DC24V	DC24V
PCB width	8MM	10MM
Cutting length	55.56MM	55.56MM
Cutting Unit	7LEDS	7LEDS
Power/M	8W/m	10W/m
Luminous flux		
2700K (RA80)	1104Lm/m	1380Lm/m
3000K (RA80)	1120Lm/m	1400Lm/m
4000K (RA80)	1160Lm/m	1450Lm/m
6000K (RA80)	1200Lm/m	1500Lm/m

LW2835-WN128-24V-8MM

- Safety voltage,resistance control current
- 128LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	128LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	62.5MM
Cutting Unit	8LEDS
Power/M	9W/m
Luminous flux	
2700K (RA80)	1422Lm/m
3000K (RA80)	1400Lm/m
4000K (RA80)	1485Lm/m
6000K (RA80)	1530Lm/m



LW2835-WN140-24V-8MM/10MM

- Safety voltage,resistance control current
- 140LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	140LEDs/m	140LEDs/m
Input Voltage	DC24V	DC24V
PCB width	8MM	10MM
Cutting length	50MM	50MM
Cutting Unit	7LEDS	7LEDS
Power/M	10W/m	12W/m
Luminous flux		
2700K (RA80)	1380Lm/m	1656Lm/m
3000K (RA80)	1400Lm/m	1680Lm/m
4000K (RA80)	1450Lm/m	1740Lm/m
6000K (RA80)	1500Lm/m	1800Lm/m

LW2835-WN176-24V-8MM

- Safety voltage,resistance control current
- 176LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	176LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	45.4MM
Cutting Unit	8LEDS
Power/M	12W/m
Luminous flux	
2700K (RA80)	1896Lm/m
3000K (RA80)	1920Lm/m
4000K (RA80)	1980Lm/m
6000K (RA80)	2040Lm/m



LW2835-WN168-24V-8MM/10MM

- Safety voltage,resistance control current
- 168LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:		
LED Type	SMD2835	SMD2835
LEDs/Meter	168LEDs/m	168LEDs/m
Input Voltage	DC24V	DC24V
PCB width	8MM	10MM
Cutting length	41.67MM	41.67MM
Cutting Unit	7LEDS	7LEDS
Power/M	12W/m	14W/m
Luminous flux		
2700K (RA80)	1656Lm/m	1932Lm/m
3000K (RA80)	1680Lm/m	1960Lm/m
4000K (RA80)	1740Lm/m	2030Lm/m
6000K (RA80)	1800Lm/m	2100Lm/m

LW2835-WN182-24V-10MM

- Safety voltage,resistance control current
- 182LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ / CRI 90+/CRI 95+ are available
- Customized power available



Product features:	
LED Type	SMD2835
LEDs/Meter	182LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	38.4MM
Cutting Unit	7LEDS
Power/M	15W/m
Luminous flux	
2700K (RA80)	2070Lm/m
3000K (RA80)	2100Lm/m
4000K (RA80)	2175Lm/m
6000K (RA80)	2250Lm/m



LW2835-WN180-24V-10MM

- Safety voltage,resistance control current
- 180LEDs/m with ultra-slim thickness of 1.2mm
- Color temperature can choose the seven optional of 2200K-7000K white light
- CRI 80+ and CRI 90+ are available
- Customized power available



24V
DC

white

color

Product features:	
LED Type	SMD2835
LEDs/Meter	180LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	50MM
Cutting Unit	9LEDs
Power/M	14W/m
Luminous flux	
2700K (RA80)	2632Lm/m
3000K (RA80)	2660Lm/m
4000K (RA80)	2730Lm/m
6000K (RA80)	2800Lm/m

LW2216-WN140-24V-8MM

- Safety voltage,resistance control current
- 140LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



24V
DC

white

Product features:	
LED Type	SMD2216
LEDs/Meter	140LEDs/m
Input Voltage	DC24V
PCB width	8MM
Cutting length	50MM
Cutting Unit	7 LEDs
Power/M	10W/m
Luminous flux	
2700K (RA90)	900Lm/m
3000K (RA90)	910Lm/m
4000K (RA90)	930Lm/m
6000K (RA90)	970Lm/m



LW2216-WN280-24V-10MM

- Safety voltage,resistance control current
- 280LEDs/m with slim thickness of 1.2mm
- Color temperature can choose the six optional of 1800K-7000K white light
- CRI 90+ are available
- Customized power available



24V
DC

white

Product features:	
LED Type	SMD2216
LEDs/Meter	280LEDs/m
Input Voltage	DC24V
PCB width	10MM
Cutting length	25MM
Cutting Unit	7 LEDs
Power/M	16W/m
Luminous flux	
2700K (RA90)	1440Lm/m
3000K (RA90)	1456Lm/m
4000K (RA90)	1488Lm/m
6000K (RA90)	1552Lm/m



Silicone Neon Strip




Silicone Extrusion LED Strip

IP65 Hollow Silicone Extrusion




Dimension

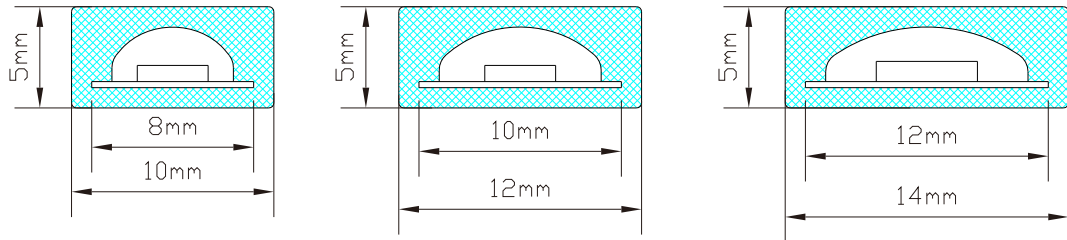

IP68 Solid Silicone Extrusion



Dimension

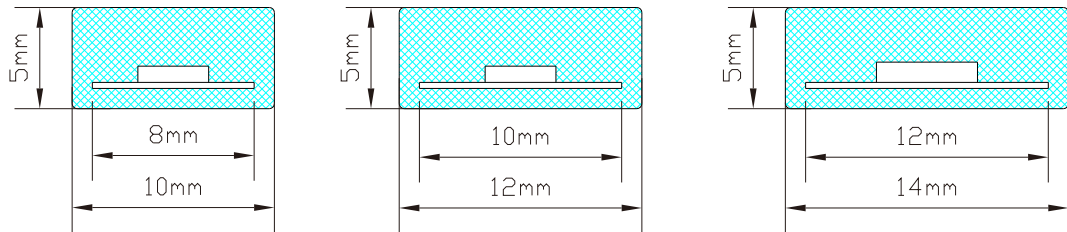

Neon Silicone Tube



Neon Silicone Tube



Neon Silicone Tube






Neon Silicone Tube




Neon Silicone Tube





Neon Silicone Tube

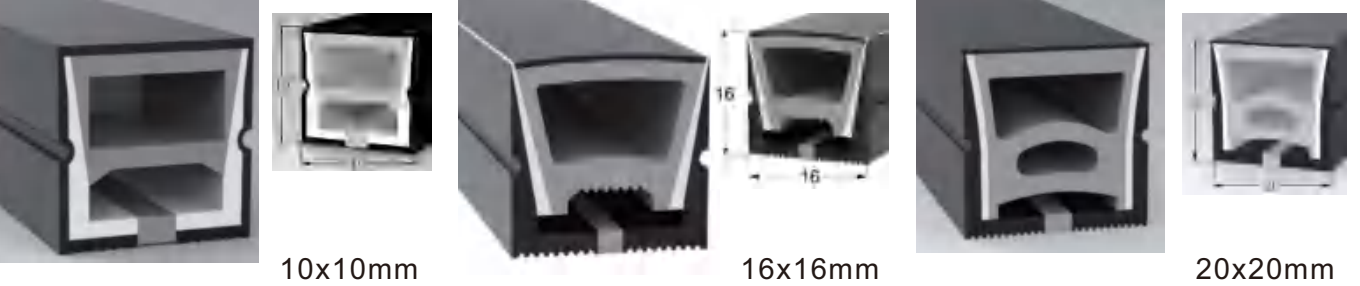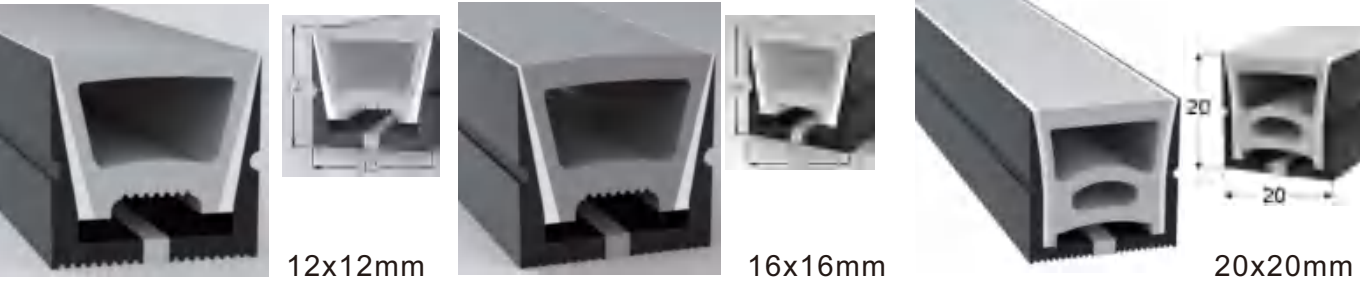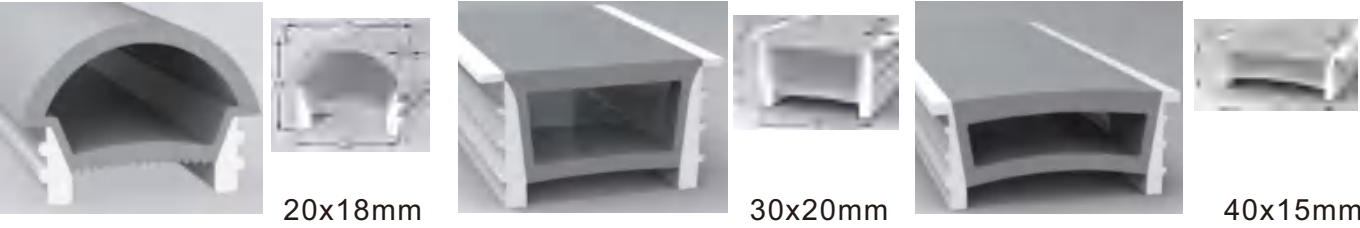

Neon Silicone Tube

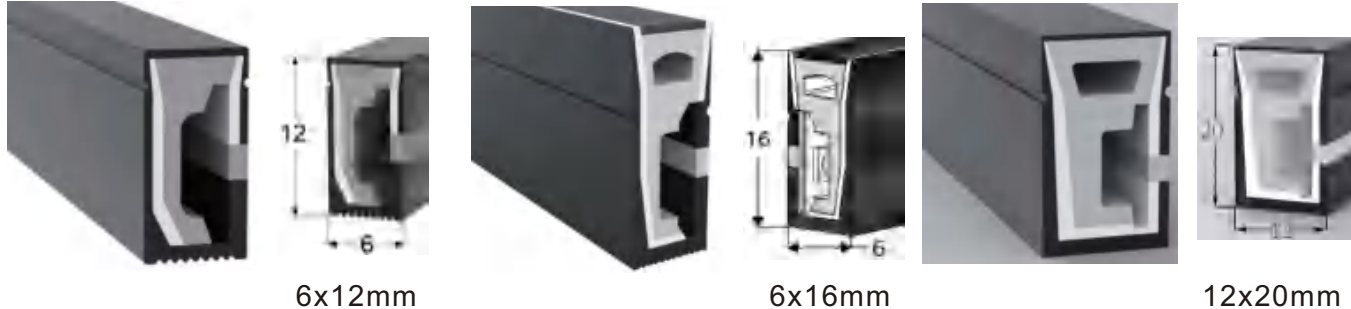


Silicone Extrusion Neon Flex

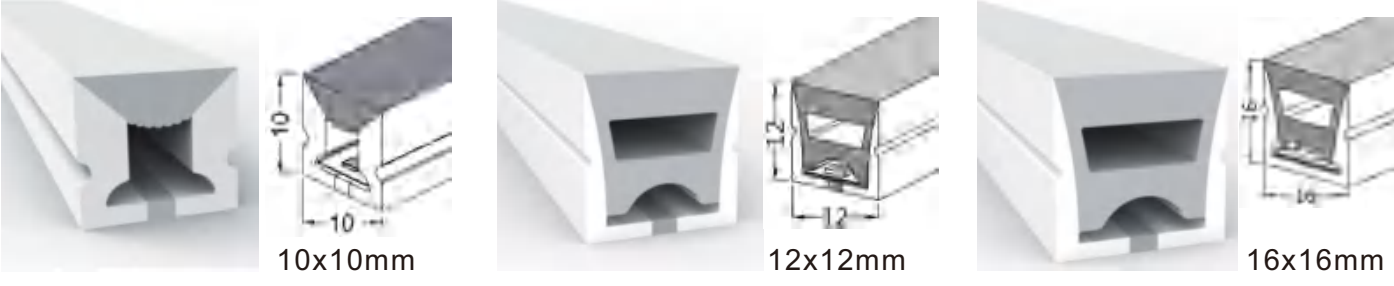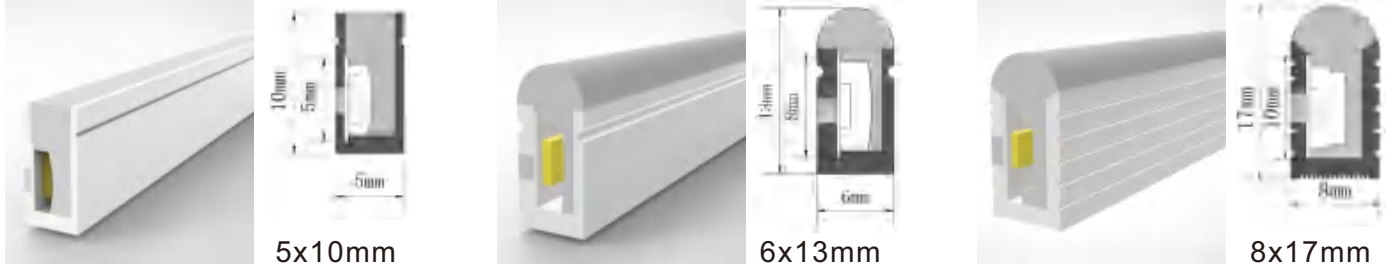

LED Strip Accessories

Power supply/Adapter/Controller/Connector etc.

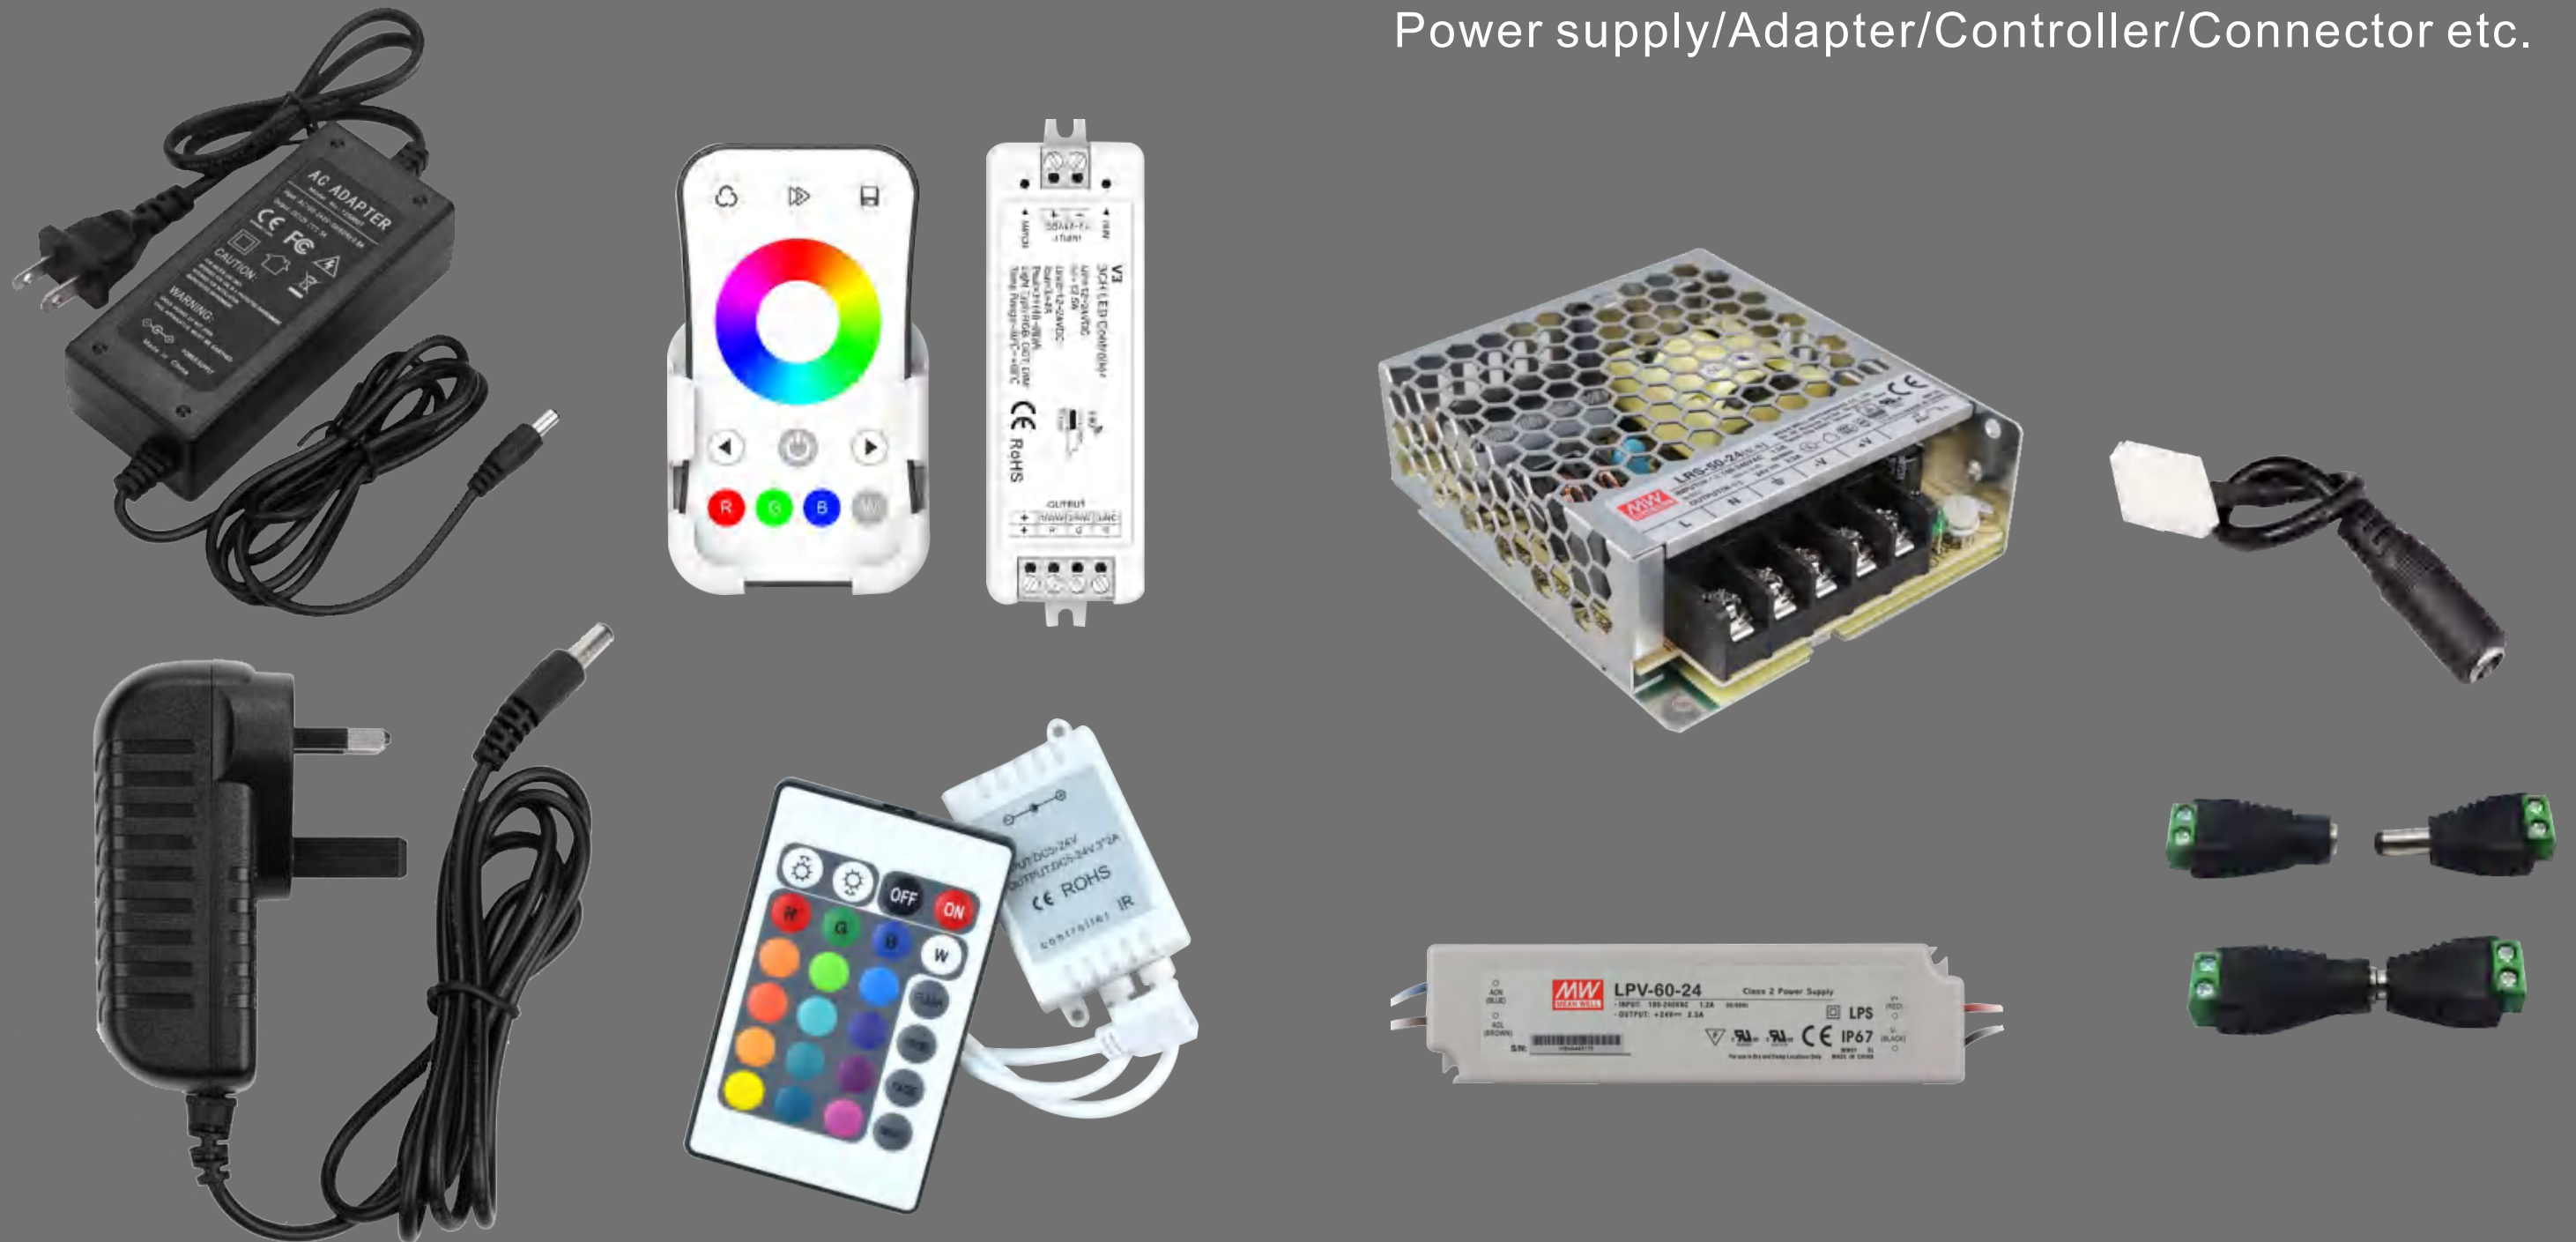

LED Driver Series



12W Wall-Mounted Power Adaptor



18W Wall-Mounted Power Adaptor



24W Wall-Mounted Power Adaptor



36W Desktop Power Adaptor



60W Desktop Power Adaptor



72W Desktop Power Adaptor



60W Non-waterproof power supply



100W Non-waterproof power supply



150W Non-waterproof power supply



200W Non-waterproof power supply



250W Non-waterproof power supply



300W Non-waterproof power supply

Mean Well Power Series



Waterproof LPV-20W



Waterproof LPV-35W



Waterproof LPV-60W



Waterproof LPV-100W



Waterproof LPV-150W



Non-waterproof LRS-35W



Non-waterproof LRS-50W



Non-waterproof LRS-75W



Non-waterproof LRS-100W



Non-waterproof LRS-150W



Non-waterproof LRS-200W



Non-waterproof LRS-350W

OSRAM Power Series



Non-waterproof 30W 24V



Non-waterproof 60W 24V



Non-waterproof 120W 24V



Non-waterproof 180W 24V



Non-waterproof 250W 24V



Waterproof 80W 24V



Waterproof 150W 24V



Waterproof 200W 24V



Waterproof 300W 24V



Non-waterproof DALI 50W 24V



Non-waterproof DALI 80W 24V



Non-waterproof DALI 160W 24V

Cabinet light accessories

Power



12V 24W



12V 36W



12V 60W



12V 100W

Master control external sensor



Master control body sensor



Master control hand scan sensor



Master control door touch sensor



Master control touch sensor

Sub-control external sensor



Sub-control human body sensor



Sub-control hand scan sensor



Sub-control door touch sensor



Sub-control touch sensor

Wire/Junction Box/Digital LED strip controller



DuPont terminal line



Junction box



Single color digital LED strip



Dual color digital LED strip

DMX512 Digital LED strip controller



Master controller



Branch Controller



Branch Controller



Multifunctional offline controller

LED Controller Series



Single Color Dimmer



2in1 WIFI Controller



RGB RGBW RGB CCT WIFI Controller



2.4G 4-ZONES CW&WW LED Controller



2.4G full touch RGB LED Controller system



2.4G full touch RGBW LED Controller system



2.4G full touch RGB+CCT LED Controller system



Single Color Light Dimmer



CCT Light Dimmer



RGB Controller



RGBW Controller



RGB+CCT Controller

LED Connector Series



8mm/10mm/12mm Connector



Non-welding Corner Connector



COB connector



Single color DC connector



8mm/10mm/12mm Connector



DC Jack



Dual Color DC Connector




Wires



Waterproof Connector



SM Docking Terminal Cable

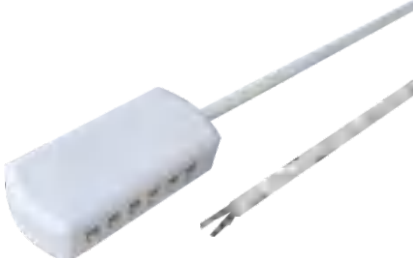


6 ways Distributor



Solderless connector

ADHESIVE TAPE

		Adhesive Thickness (mm)
3M 9495 300LSE		0.17MM
3M 9472 300LSE		0.13MM
3M 9448 Tape		0.14MM
3M 9080 Tape		0.16MM
3M 9088 Tape		0.2MM
3M 5604 Tape		0.4MM
3M 5925 Tape		0.64MM