

lightwolf® 
Ihr spezielles Licht




LED NEONFLEX & BORDER LIGHTING



LW-NF-S-6x12-..

Dimensions:

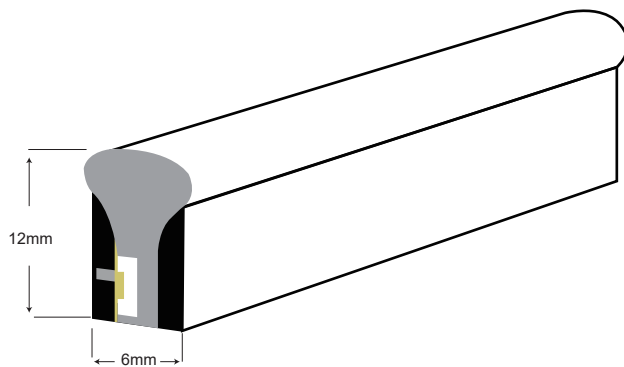


Technical Parameter:

Lumen package	240lm				
Power	8W				
Max Length	5m				
Kelvins	2700K	3000K	4000K	5000K	6500K
CRI	80				
Light efficiency	30				
Leds/m	120				
Voltage	12V				
Tape width	6mm				
Cutting step	<5				
Waterproof grade	IP65				
Tc Temperture	<80 C				
Operating Temperature	-35 C~50 C				
Beam Angle	120°				
Dimmable	Yes				
Strip length per reel	5m/50m				



General information


To produce our indoor flexible LED strips, we use Sanan LEDs chip, durable copper PCB and a current stabilization system inside the LED strip. Thermal conductive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

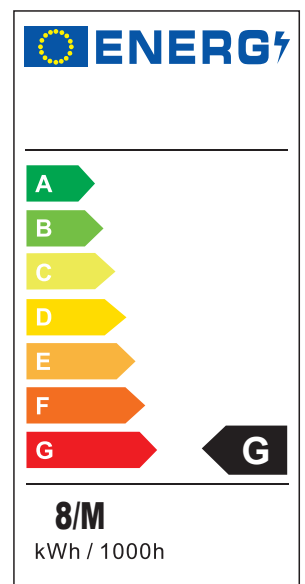

Disclaimer: the product details seen in photo may slightly differ in real product. For more information, please contact our sales.


LW-NF-S-9x15-

Dimensions:

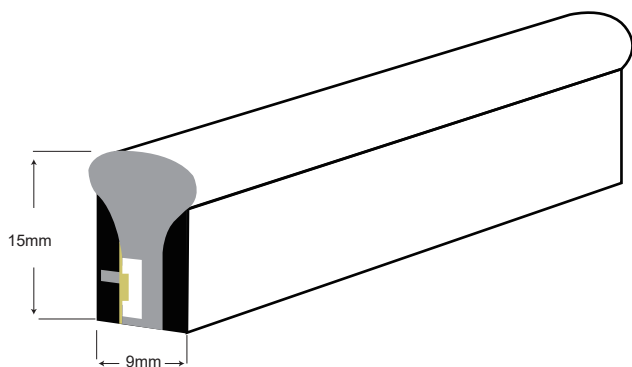

Technical Parameter:

Lumen package	320lm				
Power	12W				
Max Length	5m(12V)	10m(24V)	50m(110V/230V)		
Kelvins	2700K	3000K	4000K	5000K	6500K
CRI	80				
Light efficiency	26.7				
Leds/m	120				
Voltage	12V/24V/110V/230V				
Tape width	9mm				
Cutting step	<5				
Waterproof grade	IP65				
Tc Temperture	<80 °C				
Operating Temperature	-35 °C~50 °C				
Beam Angle	120°				
Dimmable	Yes				
Strip length per reel	5m/50m				



General information

To produce our indoor flexible LED strips, we use Sanan LEDs chip, durable copper PCB and a current stabilization system inside the LED strip. Thermal conductive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.




Disclaimer: the product details seen in photo may slightly different in real product. For more information, please contact our sales.




LW-NF-S-15x26-

Dimensions:

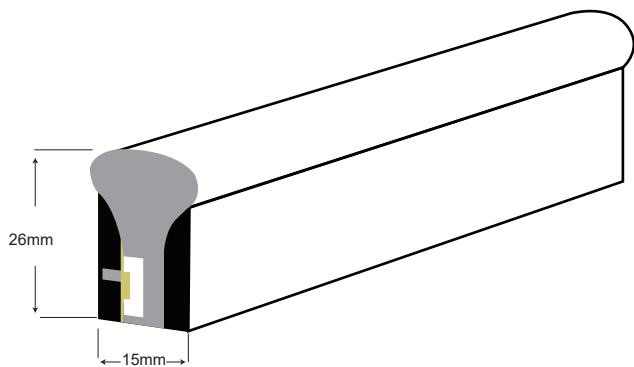

Technical Parameter:

Lumen package	460lm					
Power	12W					
Max Length	5m(12V)	10m(24V)	50m(110V230V)			
Kelvins	2700K	3000K	4000K	5000K	6500K	RGB
CRI	80					
Light efficiency	38.33					
Leds/m	120					
Voltage	12V/24V/110V/230V					
Tape width	6mm					
Cutting step	<5					
Waterproof grade	IP65					
Tc Temperture	<80 C					
Operating Temperture	-35 C~50 C					
Beam Angle	120°					
Dimmable	Yes					
Strip length per reel	5m/50m					



General information

To produce our indoor flexible LED strips,we use Sanan LEDs chip,durable copper PCB and a current stabilization system inside the LED strip.Thermal conductive tape guaraantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term pro-fessional lighting applications and perfectly fit in any linear or curved applications.

A

B

C

D

E

F

G

G

12/M
kWh / 1000h





Disclaimer:the product details seen in photo may sightly different in real product. For more information, please contact our sales.



LW-NF-S-RU16/18-

Dimensions:

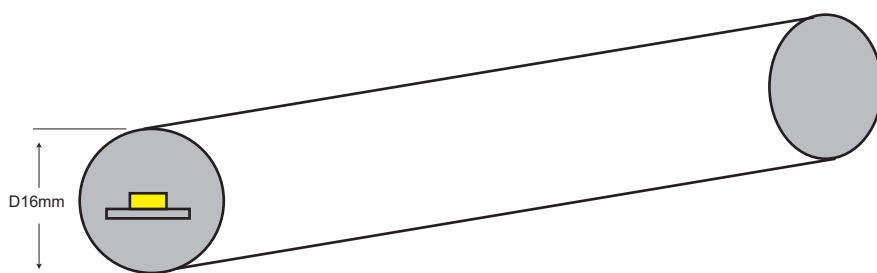


Technical Parameter:

Lumen package	520lm				
Power	12W				
Max Length	5m(12V)	10m(24V)	50m(110V/230V)		
Kelvins	2700K	3000K	4000K	5000K	6500K
CRI	80				
Light efficiency	43.33				
Leds/m	120				
Voltage	12V/24V/110V/230V				
Tape width	6mm				
Cutting step	<5				
Waterproof grade	IP65				
Tc Temperture	<80 C				
Operating Temperture	-35 C ~50 C				
Beam Angle	120°				
Dimmable	Yes				
Strip length per reel	5m/50m				

 High quality LEDs	 3 Step MacAdam	 Stabilized Current	 2-years Warranty	 LVD EMC	 2.0	 2.0
--	---	---	---	--	--	--

General information

To produce our indoor flexible LED strips, we use Sanan LEDs chip, durable copper PCB and a current stabilization system inside the LED strip. Thermal conductive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

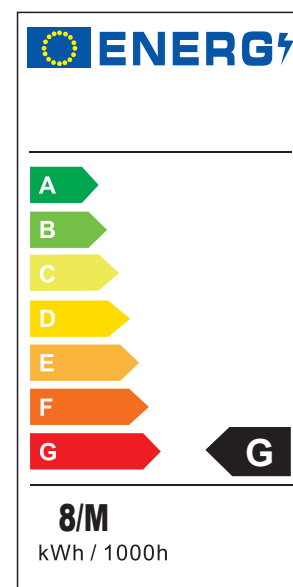


Disclaimer: the product details seen in photo may slightly different in real product. For more information, please contact our sales.



LW-NF-S-E16x16-

Dimensions:

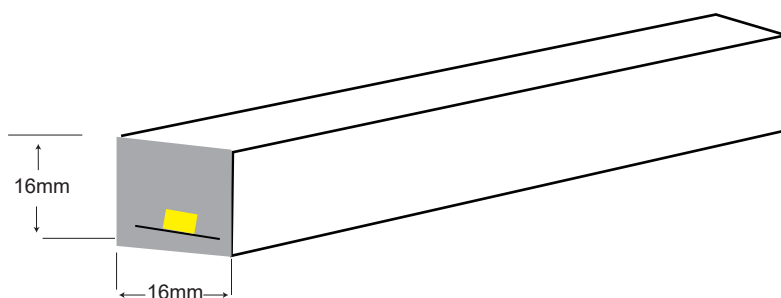


Technical Parameter:

Lumen package	460lm					
Power	12W					
Max Length	5m(12V)	10m(24V)	50m(110V/230V)			
Kelvins	2700K	3000K	4000K	5000K	6500K	RGB
CRI	80					
Light efficiency	38.33					
Leds/m	120					
Voltage	12V/24V/110V/230V					
Tape width	6mm					
Cutting step	<5					
Waterproof grade	IP65					
Tc Temperature	<80 °C					
Operating Temperature	-35 °C~50 °C					
Beam Angle	120°					
Dimmable	Yes					
Strip length per reel	5m/50m					




General information

To produce our indoor flexible LED strips, we use Sanan LEDs chip, durable copper PCB and a current stabilization system inside the LED strip. Thermal conductive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.




12/M
kWh / 1000h

Disclaimer: the product details seen in photo may slightly different in real product. For more information, please contact our sales.

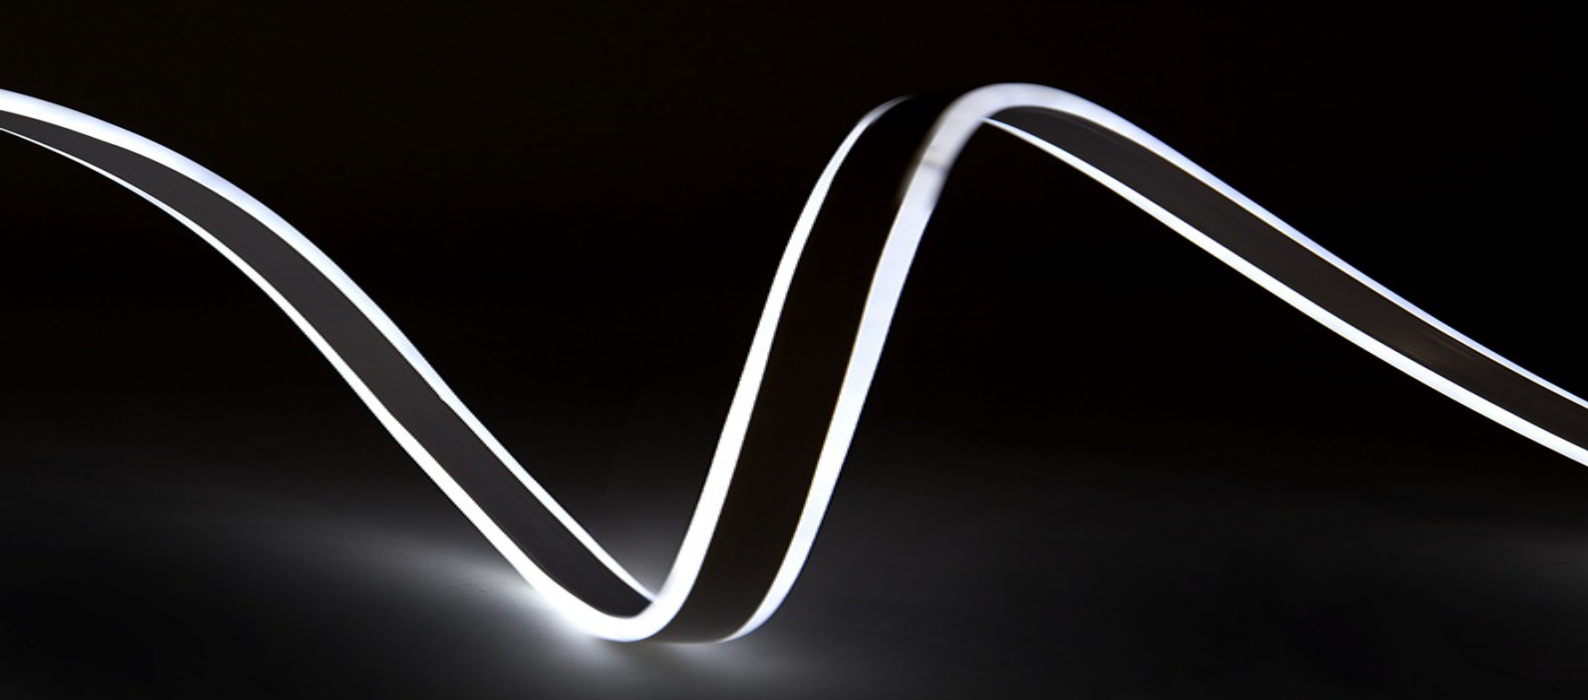

LW-NF-DS-S8x16-


Dimensions:

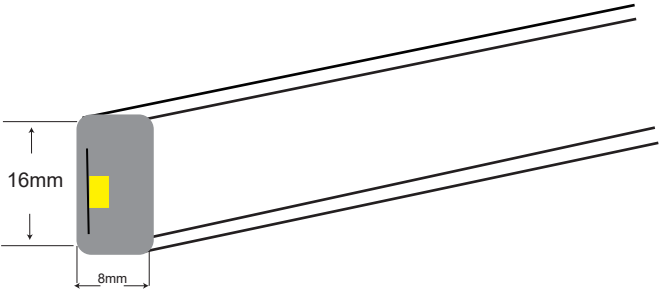

Technical Parameter:

Lumen package	460lm					
Power	12W					
Max Length	5m(12V)	10m(24V)	50m(110V230V)			
Kelvins	2700K	3000K	4000K	5000K	6500K	RGB
CRI	80					
Light efficiency	38.33					
Leds/m	120					
Voltage	12V/24V/110V/230V					
Tape width	6mm					
Cutting step	<5					
Waterproof grade	IP65					
Tc Temperture	<80 C					
Operating Temperture	-35 C~50 C					
Beam Angle	120°					
Dimmable	Yes					
Strip length per reel	5m/50m					

EPISTAR SANAN High quality LEDs	 3 Step MacAdam	 Stabilized Current	 2-years Warranty	CE LVD EMC	RoHS 2.0	ERP 2.0
--	-----------------------	---------------------------	-------------------------	-------------------------	--------------------	-------------------



General information

To produce our indoor flexible LED strips, we use Sanan LEDs chip, durable copper PCB and a current stabilization system inside the LED strip. Thermal conductive tape guarantees perfect heat transfer to the mounting surface. All of our product features guarantee extra long lifetime and stable performance. Our flexible LED light strips are designed for long-term professional lighting applications and perfectly fit in any linear or curved applications.

A

B

C

D

E

F

G

G

12/M
kWh / 1000h

Disclaimer: the product details seen in photo may slightly different in real product. For more information, please contact our sales.